

Βαλβίδες κατεύθυνσης - μηχανικά ενεργοποιούμενες 1/8" έως 1/4" Σειρά VC



VCMS32 . M .



VCMS52M1 .



VCMS52S1 .



VCLR32.M8



VCLR52M18



VCLR52018



VCLL32.M8



VCLL52M18

Τύπος κατασκευής	Συρταρωτή βαλβίδα, μηχανικά ενεργοποιούμενο
Σύνδεση	G1/8" ... G1/4" σύμφωνα με ISO228/1
Ονομαστική διάμετρος	G1/8" DN 6mm, G1/4" DN 8mm
Παροχή	G1/8" 650NI/min, G1/4" 1080NI/min
Εύρος πίεσης	0...10bar
Υλικά κατασκευής	Σώμα Επινικελωμένο αλουμίνιο, Συρταρωτή βαλβίδα Ανοξείδωτος χάλυβας, Στεγανοποιήσεις NBR
Τύπος στερέωσης	Διαμπερείς οπές στο σώμα βαλβίδας
Θέση εγκατάστασης	οποιοδήποτε
Μέσο	φιλτραρισμένος και λαδωμένος ή μη λαδωμένος πεπιεσμένος αέρας
Θερμοκρασία μέσου	0...+40°C
Θερμοκρασία περιβάλλοντος	-10...+50°C
Σημείωση	Αρχεία CAD είναι διαθέσιμα στο STASTO-Store στη διεύθυνση www.stasto.eu



VCMS32 . M8 Βαλβίδα 3/2 οδών G1/8" Έκκεντρο/ελατήριο

		Λειτουργία	F ελάχ.	F μέγ.	Τύπος
		NC	20N	40N	VCMS326M8
		NO	20N	40N	VCMS329M8

VCMS32 . M4 Βαλβίδα 3/2 οδών G1/4" Έκκεντρο/ελατήριο

		Λειτουργία	F ελάχ.	F μέγ.	Τύπος
		NC	40N	60N	VCMS326M4
		NO	40N	60N	VCMS329M4

VCMS52M18 Βαλβίδα 5/2 οδών G1/8" Έκκεντρο/ελατήριο



		F ελάχ.	F μέγ.	Τύπος
		20N	40N	VCMS52M18

VCMS52M14 Βαλβίδα 5/2 οδών G1/4" Έκκεντρο/ελατήριο



		F ελάχ.	F μέγ.	Τύπος
		40N	60N	VCMS52M14



VCMS52S18 Βαλβίδα 5/2 οδών G1/8" Έκκεντρο/Έκκεντρο

 Technical drawing of the VCMS52S18 valve. The front view (left) shows a cylindrical body with a total length of 83.5 mm, a mounting flange diameter of Ø8, and a mounting hole diameter of 18 mm. The side view (right) shows a total length of 73.5 mm, a mounting flange diameter of Ø15, and a mounting hole diameter of 16 mm. The valve has a 20 mm diameter body and a 20 mm diameter mounting flange.	 Technical drawing of the VCMS52S18 valve showing a top view. The valve has a 14 mm diameter body and a 12 mm diameter mounting flange. The mounting flange has a 4 mm diameter hole and a 2 mm diameter hole. The mounting flange has a 5 mm diameter hole and a 13 mm diameter hole.	Τύπος VCMS52S18
---	---	-------------------------------


VCMS52S14 Βαλβίδα 5/2 οδών G1/4" Έκκεντρο/Έκκεντρο

		Τύπος
 Technical drawing of the VCMS52S14 valve. The front view (left) shows a rectangular body with a total height of 85.3 mm, a top flange diameter of Ø 10 mm, and a bottom flange diameter of Ø 30 mm. The side view (right) shows a total length of 88.5 mm, a top flange diameter of Ø 20 mm, and a bottom flange diameter of Ø 25 mm. The drawing also indicates a G1/4 connection and a 20.5 mm dimension for the side flange.	 Schematic diagram of the VCMS52S14 valve. It shows a rectangular body with four ports: 14 (top left), 4 (top right), 2 (bottom right), and 5 (bottom left). The diagram also indicates a 12 mm dimension for the right side of the body.	VCMS52S14

VCLR32 . M8 Βαλβίδα 3/2 οδών G1/8" Κύλινδρος/Ελατήριο



		Λειτουργία	F ελάχ.	F μέγ.	Τύπος
		NC	10N	20N	VCLR326M8
		NO	10N	20N	VCLR329M8

VCLR52M18 Βαλβίδα 5/2 οδών G1/8" Κύλινδρος/Ελατήριο

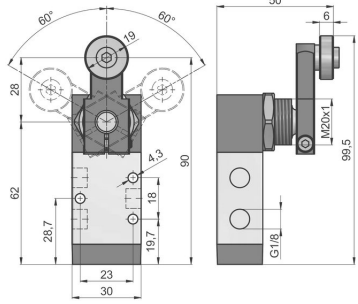

 Technical drawing of the VCLR52M18 valve. The front view shows a vertical assembly with a total height of 101.8 mm and a base width of 20 mm. The side view shows a total height of 53.5 mm, a base width of 30 mm, and a mounting bracket with a 18 mm hole and a 4.2 mm offset. The valve body has a G1/8 connection and a 27.5 mm section.	 Technical drawing of the VCLR52M18 valve showing a top view. The drawing includes dimensions for the mounting bracket (14, 4, 2, 5, 1, 3) and a 12 mm section.	F ελάχ.	F μέγ.	Τύπος
		10N	20N	VCLR52M18



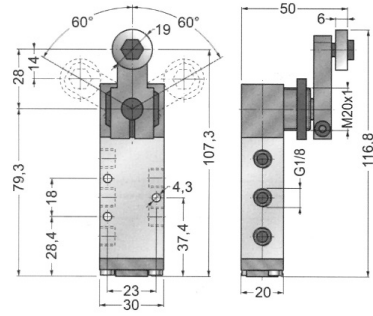

VCLR52018 Βαλβίδα 5/2 οδών G1/8" Ρολό/Ρολό

		Τύπος
		VCLR52018

VCLL326M8 Βαλβίδα 3/2 οδών G1/8" Κύλινδρος/Ελατήριο

		Λειτουργία	Τύπος
		NC	VCLL326M8

VCLL52M18 Βαλβίδα 5/2 οδών G1/8" Κύλινδρος/Ελατήριο

		Τύπος
		VCLL52M18

Εικόνες χωρίς δέσμευση

Με την επιφύλαξη αλλαγών στον σχεδιασμό, στις διαστάσεις και στα υλικά

Πνευματική τεχνολογία / Βαλβίδες κατεύθυνσης – μηχανικές / χειροκίνητες, πνευματικά στοιχεία ελέγχου / Έκκεντρες βαλβίδες / Βαλβίδα 5/2 οδών Σειρά VCMS

Έκδοση 7

138326 / Δημιουργήθηκε 2026/40 EL

ΚΑΤΑΣΚΕΥΑΣΤΗΚΕ ΣΤΗΝ ΕΥΡΩΠΗ

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Ανοιγμα σειράς online

Σελίδα 4 / 4

