

Razvodni ventili - mehanički upravljani aktivirani 1/8" do 1/4" Serija VC



VCMS32 . M .



VCMS52M1 .



VCMS52S1 .



VCLR32.M8



VCLR52M18



VCLR52018



VCLL32.M8






VCLL52M18




Izvedba	Klizni ventil, mehanički upravljano
Priključak	G1/8" ... G1/4" prema ISO228/1
Nazivni promjer	G1/8" DN 6mm, G1/4" DN 8mm
Protok	G1/8" 650NI/min, G1/4" 1080NI/min
Raspon tlaka	0...10bar
Materijali	Tijelo Niklovani aluminij, Klizač Nehrđajući čelik, Brtve NBR
Način pričvršćivanja	Prolazni provrti u tijelu ventila
Položaj ugradnje	proizvoljno
Medij	filtrirani i podmazani ili nepodmazani komprimirani zrak
Temperatura medija	0...+40°C
Temperatura okoline	-10...+50°C
Napomena	CAD datoteke dostupne su u STASTO Storeu na www.stasto.eu





VCMS32 . M8 3/2-putni ventil G1/8" Breg/opruga

		Funkcija	F min.	F maks.	Tip
		NC	20N	40N	VCMS326M8
		NO	20N	40N	VCMS329M8



VCMS32 . M4 3/2-putni ventil G1/4" Breg/opruga

		Funkcija	F min.	F maks.	Tip
		NC	40N	60N	VCMS326M4
		NO	40N	60N	VCMS329M4

VCMS52M18 5/2-putni ventil G1/8" Breg/opruga



		F min.	F maks.	Tip
		20N	40N	VCMS52M18

VCMS52M14 5/2-putni ventil G1/4" Breg/opruga



		F min.	F maks.	Tip
		40N	60N	VCMS52M14






VCMS52S18 5/2-putni ventil G1/8" Breg/breg

		Tip
		VCMS52S18



VCMS52S14 5/2-putni ventil G1/4" Breg/breg

		Tip
		VCMS52S14

VCLR32 . M8 3/2-putni ventil G1/8" Valjak/opruga



		Funkcija	F min.	F maks.	Tip
		NC	10N	20N	VCLR326M8
		NO	10N	20N	VCLR329M8

VCLR52M18 5/2-putni ventil G1/8" Valjak/opruga

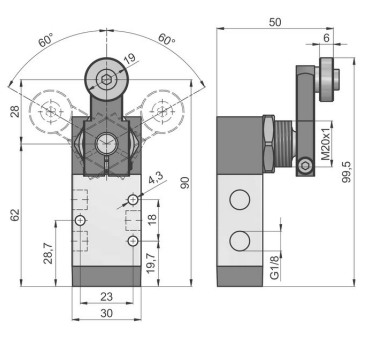

		F min.	F maks.	Tip
		10N	20N	VCLR52M18



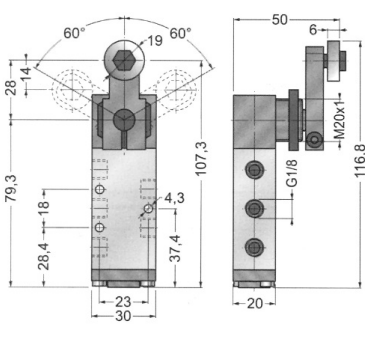

VCLR52018 5/2-putni ventil G1/8" Valjak/valjak

		Tip
		VCLR52018

VCLL326M8 3/2-putni ventil G1/8" Valjak/opruga

		Funkcija	Tip
		NC	VCLL326M8

VCLL52M18 5/2-putni ventil G1/8" Valjak/opruga

		Tip
		VCLL52M18

Ilustracije neobvezujuće

Zadržavamo pravo na konstrukcijske, dimenzijske i materijalne izmjene.

Pneumatika / Razvodni ventili – mehanički / ručni, pneumatski upravljački elementi / Ventili s kotrljajućim valjkom / 3/2-putni ventil Serija VCLL

Verzija 6

138328 / Generirano 2026/33 HR

PROIZVEDENO U EUROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Stranica 4 / 4

