

Logički elementi

Tip AND42, OR42, YES, NOT-S, MV32



AND42, OR42



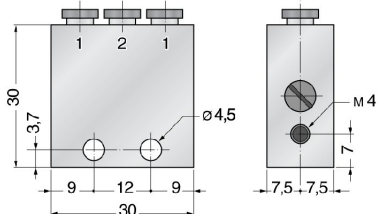

MV32



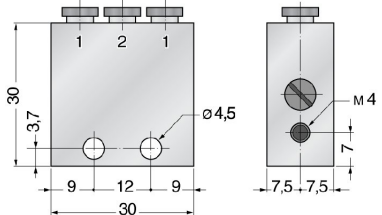

YES, NOT-S

Priključak	4 mm utisni priključak MV32: G1/8"...G1/4"
Raspon tlaka	2...10bar
Protok	95 NI/min MV32: 500 NI/min odnosno 1100 NI/min
Medij	filtrirani i podmazani ili nepodmazani komprimirani zrak
Napomena	CAD-datoteke dostupne su u STASTO Store na www.stasto.eu

AND42 I element

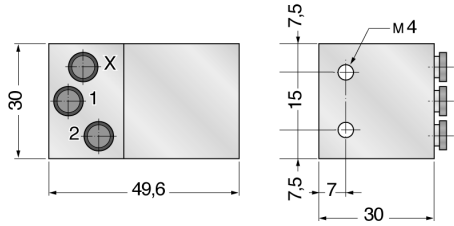

	Funkcija	Tip
		AND42

OR42 ILI-element

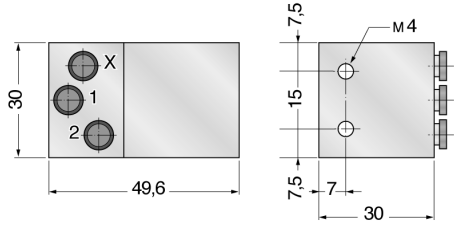

	Funkcija	Tip
		OR42



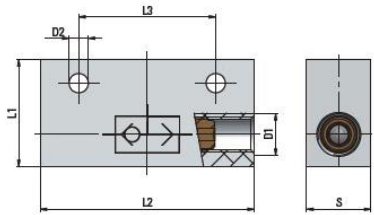

YES YES-element

		Funkcija	Tip
		YES	YES

NOT-S NOT-element

		Funkcija	Tip
		NOT	NOT-S

MV32 ILI-element

		Funkcija
		ILI

Priključak D1	D2	L1	L2	L3	S	Protok [Nl/min]	Tip
G1/8"	4,5	25	50	32	15	500	MV32-00-18
G1/4"	5,5	30	52	35	25	1100	MV32-00-14

Ilustracije neobvezujuće
Zadržavamo pravo na konstrukcijske, dimenzijske i materijalne izmjene.

Pneumatika / Razvodni ventili – mehanički / ručni, pneumatski upravljački elementi / Pneumatski logički ventili / Dvostruki nepovratni ventil Serija MV32