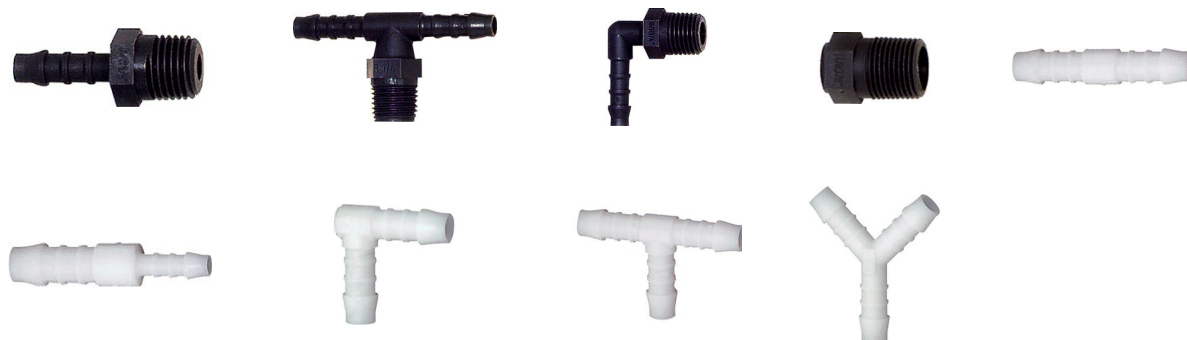


Letkuliittimet - PA6 tai vastaavasti POM




Liitäntä	R1/8"..."R2" Kartiokierrettä kierre mukaan ISO 7/1, M5 ISO:n mukaan R/262
Materiaali	Kierreläitimet PA6, Liitin POM
Aineväliaine	Paineilma, neutraalit kaasut, Kaasut ja nesteet, jotka eivät kemiallisesti vahingoita materiaaleja
Aineen lämpötila	-40...+90°C
Käyttöpaine	-1...10 bar

T-liitin

	varten letku D1 [mm]	D2	L1	L3	Tyyppi
	3	2,5	25	12,5	HN26-03-P
	4	2,7	35	19,5	HN26-04-P
	5	3	42	22	HN26-05-P
	6	4	50	26	HN26-06-P
	8	5,6	58	30	HN26-08-P
	10	7	62,5	33,5	HN26-10-P
	12	8,6	69	36	HN26-12-P
	13	8,6	68	36	HN26-13-P
	16	12	81	45	HN26-16-P
	19	15	85	45	HN26-19-P

T-letkuliitin, sisäkierretty letkunippa - Kartiokierrettä kierre

	ulkokierre D2	varten letku D1 [mm]	D3	L1	L4	SW	Tyyppi
	R1/8"	4	2,5	21	20	10	HN26C-04-18-D
	R1/8"	6	4	28,5	21	10	HN26C-06-18-D
	R1/4"	4	2,5	21	26	14	HN26C-04-14-D
	R1/4"	6	4	28,5	26	14	HN26C-06-14-D
	R1/4"	8	5,6	33	27,5	14	HN26C-08-14-D




Y-haaraliitin

	varten letku D1 [mm]	D2	L1	Tyyppi
	3	2,5	21	HN31-03-P
	4	2,5	25,5	HN31-04-P
	5	3	43	HN31-05-P
	6	4	44	HN31-06-P
	8	5,6	51	HN31-08-P
	10	7	54	HN31-10-P
	12	8,6	64	HN31-12-P
	13	9	65	HN31-13-P
	16	12	67	HN31-16-P
	19	15	72	HN31-19-P

Suora liitin

	varten letku D1 [mm]	L1	Tyyppi
	3	25	HN38-03-P
	4	35	HN38-04-P
	5	45	HN38-05-P
	6	49	HN38-06-P
	8	56	HN38-08-P
	10	63	HN38-10-P
	12	66,5	HN38-12-P
	13	73	HN38-13-P
	16	75	HN38-16-P
	19	76	HN38-19-P

Suora supistusliitin

	varten letku D1 [mm]	D2	varten letku D3 [mm]	L1	Tyyppi
	4	2,5	3	30	HN38-03-04-P
	6	2,7	4	42,5	HN38-04-06-P
	8	2,7	4	48	HN38-04-08-P
	8	4	6	54	HN38-06-08-P
	10	4	6	58	HN38-06-10-P
	10	5,6	8	60,5	HN38-08-10-P
	12	5,6	8	62,5	HN38-08-12-P
	12	7	10	64	HN38-12-10-P



Kierrettävä letkunippa - Kartiokierrettiä kierre

A technical drawing of a turnable hose nipple. The drawing shows a perspective view of the component. It has a hexagonal body with a threaded end. Dimensions are labeled: D1 is the outer diameter of the hexagonal part, D2 is the outer diameter of the threaded part, D3 is the inner diameter of the threaded part, L1 is the length of the hexagonal part, and SW is the width of the hexagonal part.

ulkokierre D2	varten letku D1 [mm]	D3	L1	SW	Tyyppi
M5	3	2,5	19,5	6	HN38C-03-M5-D
R1/8"	4	2,5	27	10	HN38C-04-18-D
R1/8"	6	32,5	32,5	10	HN38C-06-18-D
R1/8"	8	5,6	38	14	HN38C-08-18-D
R1/4"	4	2,5	32	14	HN38C-04-14-D
R1/4"	5	3	36	14	HN38C-05-14-D
R1/4"	6	4	37,5	14	HN38C-06-14-D
R1/4"	8	5,6	41	14	HN38C-08-14-D
R1/4"	10	7	43,5	14	HN38C-10-14-D
R3/8"	6	4	39	17	HN38C-06-38-D
R3/8"	8	5,6	41	17	HN38C-08-38-D
R3/8"	10	7	43,5	17	HN38C-10-38-D
R3/8"	12	8,6	45,5	17	HN38C-12-38-D
R1/2"	8	5,6	49	22	HN38C-08-12-D
R1/2"	12	8,6	54	22	HN38C-12-12-D
R1/2"	16	12	58	22	HN38C-16-12-D

Kulmaliitin

A technical drawing of a 90-degree elbow fitting. The drawing shows the fitting from an isometric perspective. Dimensions are indicated with dashed lines and arrows: D1 is the outer diameter of the horizontal leg, D2 is the outer diameter of the vertical leg, L1 is the length of the horizontal leg, and L3 is the length of the vertical leg.

varten letku D1 [mm]	D2	L1	L3	Tyyppi
3	2,5	12,5	12,5	HN61-03-P
4	2,5	17,5	19,5	HN61-04-P
5	3	21	22	HN61-05-P
6	4	25	26	HN61-06-P
8	5,6	29	30	HN61-08-P
10	7	31	33,5	HN61-10-P
12	8,6	34,5	36	HN61-12-P
13	8,6	36,5	38,5	HN61-13-P
16	12	40,5	45	HN61-16-P
19	15	43,5	46	HN61-19-P


Kulmaruuvattava letkuliitin 90° - Kartiokierrettiä kierre

A technical drawing of a 90-degree turnable elbow fitting. The drawing shows the fitting from a side perspective, highlighting its L-shaped structure. Key dimensions are labeled: 'SW' for the width of the flange, 'D1' for the outer diameter of the main body, 'D2' for the outer diameter of the flange, 'D3' for the outer diameter of the threaded end, 'L1' for the length of the main body, and 'L4' for the length of the threaded section. The drawing is a black and white line drawing with dimension lines and arrows indicating the measurement points.

ulkokierre D2	varten letku D1 [mm]	D3	L1	L4	SW	Tyyppi
R1/8"	4	2,7	21	16	10	HN61C-04-18-D
R1/8"	6	4	28,5	21	10	HN61C-06-18-D
R1/4"	4	2,7	21	25	14	HN61C-04-14-D
R1/4"	6	4	28,5	26	14	HN61C-06-14-D
R1/4"	8	5,6	33	27,5	14	HN61C-08-14-D
R1/4"	10	7	38	30	14	HN61C-10-14-D
R3/8"	6	4	28,5	27	17	HN61C-06-38-D
R3/8"	8	5,6	36	31	17	HN61C-08-38-D
R3/8"	10	7	38	30	17	HN61C-10-38-D
R3/8"	12	8,6	40,5	31	17	HN61C-12-38-D
R1/2"	8	5,6	36	36	22	HN61C-08-12-D
R1/2"	12	8,6	40,5	36	22	HN61C-12-12-D



Sulkuruuvi - Kartiokierrettä kierre

	ulkokierre D2	L1	SW	Tyyppi
	R1/8"	12,5	10	TH67C-18-D
	R1/4"	17,5	14	TH67C-14-D
	R3/8"	27	17	TH67C-38-D
	R1/2"	27,5	22	TH67C-12-D

Kuvat ei-sitova

Oikeus rakenne-, mitta- ja materiaalimuutoksiin pidätetään

Pneumatiikka / Liitoselementit ja kytkimet / Liittimet / Letkuliittimet / Liittimet/Letkuliittimet - Polyamidi/POM - Paine 10bar

