

## Visokotlačna zakretna spojnica Serija C-WH-MKDS



Osnovno tijelo s maticom i rezni prsten




B3-rezni prsten




B4-rezni prsten

Izvedba	Priključak s rezanim prstenom, s B3 ili B4 prstenom za rezanje
Navoj za uvrtnje	M8x1...M48x2, s elastičnom brtvom
Vanjski promjer cijevi	4...42mm
Materijal	Pocinčani čelik
prema normi	EN ISO 8434-1 (DIN 2353)
Medij	neutralne tekućine i plinovi koji ne nagrizaju upotrijebljene materijale
Temperatura medija	B3-Rezni prsten -35...+100°C B4-Rezni prsten NBR -35...+100°C (FKM na upit)
Radni tlak	Nazivni tlak prema tablici


### Dimenzije



Osnovno tijelo



s B4-reznim prstenom




s B3-reznim prstenom

Seriya	PN [bar]	Cijev-Promjer	M	L1	L2	L3	L4	L5	L6	CH1	CH2	CH3	Tip Osnovno tijelo	Tip s B3-prstenom	Tip s B4-prstenom
LL	100	4	8x1	18	14	24	10,5	8	24	17	14	10	C-WH04LLM8X1KDSX	C-WH04LLM8X1KDS	-
		6	10x1	18	12,5	24	10,5	8	24	17	17	12	C-WH06LLM10X1KDSX	C-WH06LLM10X1KDS	-
		8	10x1	19	13,5	24	10,5	8	25	17	17	14	C-WH08LLKM10X1DSX	C-WH08LLM10X1KDS	-
L	315	6	10x1	19	12	24	10,5	8	27	17	17	14	C-WH06LM10X1KDSX	C-WH06LM10X1KDS	C-WH06ZLM10X1KDS
		8	12x1,5	21,5	14,5	32	14	12	29,5	22	19	17	C-WH08LM12X1,5KDSX	C-WH08LM12X1,5KDS	C-WH08ZLM12X1,5KDS
		10	14x1,5	22,5	15,5	32	14	12	30,5	22	19	19	C-WH10LM14X1,5KDSX	C-WH10LM14X1,5KDS	C-WH10ZLM14X1,5KDS
		12	16x1,5	25	18	38,5	16,5	12	33	27	24	22	C-WH12LM16X1,5KDSX	C-WH12LM16X1,5KDS	C-WH12ZLM16X1,5KDS
		15	18x1,5	29	22	42	18,5	12	37	32	30	27	C-WH15LM18X1,5KDSX	C-WH15LM18X1,5KDS	C-WH15ZLM18X1,5KDS



	18	22x1,5	29	21,5	40,5	21,5	14	38	32	30	32	C-WH18LM22X1,5KDSX	C-WH18LM22X1,5KDS	C-WH18ZLM22X1,5KDS
160	22	26x1,5	34	26,5	54	24	16	43	41	36	36	C-WH22LM26X1,5KDSX	C-WH22LM26X1,5KDS	C-WH22ZLM26X1,5KDS
	28	33x2	38,5	31	66,5	30,5	18	47,5	50	46	41	C-WH28LM33X2KDSX	C-WH28LM33X2KDS	C-WH28ZLM33X2KDS
	35	42x2	45,5	35	80	35,5	20	56,5	60	55	50	C-WH35LM42X2KDSX	C-WH35LM42X2KDS	C-WH35ZLM42X2KDS
	42	48x2	50,5	39,5	90	40,5	22	62,5	70	60	60	C-WH42LM48X2KDSX	C-WH42LM48X2KDS	C-WH42ZLM48X2KDS

## Dimenzije

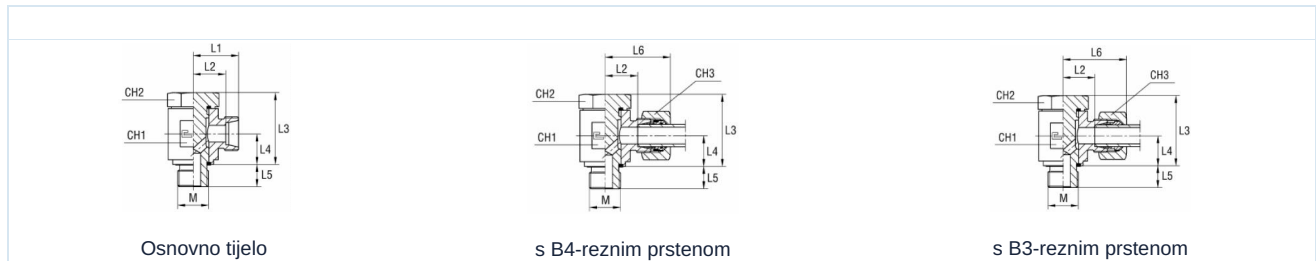

Seriya	PN [bar]	Cijev-Promjer	M	L1	L2	L3	L4	L5	L6	CH1	CH2	CH3	Tip Osnovno tijelo	Tip s B3-prstenom	Tip s B4-prstenom
S	630	6	12x1,5	23,5	16,5	32	14	12	31,5	22	19	17	C-WH06SM12X1,5KDSX	C-WH06SM12X1,5KDS	C-WH06ZSM12X1,5KDS
		8	14x1,5	23,5	16,5	32	14	12	31,5	22	19	19	C-WH08SM14X1,5KDSX	C-WH08SM14X1,5KDS	C-WH08ZSM14X1,5KDS
		10	16x1,5	26	18,5	38,5	16,5	12	35	27	24	22	C-WH10SM16X1,5KDSX	C-WH10SM16X1,5KDS	C-WH10ZSM16X1,5KDS
		12	18x1,5	29	21,5	42	18,5	12	38	32	27	24	C-WH12SM18X1,5KDSX	C-WH12SM18X1,5KDS	C-WH12ZSM18X1,5KDS
	14	20x1,5	31	23	45	20	14	41	32	30	27	C-WH14SM20X1,5KDSX	C-WH14SM20X1,5KDS	C-WH14ZSM20X1,5KDS	
	20	27x2	36	25,5	54	24	16	47	41	36	36	C-WH20SM27X2KDSX	C-WH20SM27X2KDS	C-WH20ZSM27X2KDS	
	25	33x2	42,5	31,5	66,5	30,5	18	54,5	50	46	46	C-WH25SM33X2KDSX	C-WH25SM33X2KDS	C-WH25ZSM33X2KDS	
	30	42x2	49,5	36	80	35,5	20	62,5	60	55	50	C-WH30SM42X2KDSX	C-WH30SM42X2KDS	C-WH30ZSM42X2KDS	
315	38	48x2	56,5	40,5	90	40,5	22	71,5	70	60	60	C-WH38SM48X2KDSX	C-WH38SM48X2KDS	C-WH38ZSM48X2KDS	

Slike nisu obvezujuće

Zadržavamo pravo na konstrukcijske, dimenzijske i promjene materijala.

Pneumatika / Spojni elementi i spojnice / Rezni prstenasti priključci / Rezni prstenasti priključci - Pocičani čelik ISO 8434-1 (DIN 2353) / Visokotlačni zakretni priključak Serija C-WH-MKDS

Verzija 5

138489 / Generirano 2026/24 HR

PROIZVEDENO U EUROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Stranica 2 / 2

