


## Multikobling Serie COM



|                            |                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Konstruktionstype          | Multikobling, fri gennemgang                                                                                           |
| Tilslutning                | Push-in fittings 4mm, 6mm hhv. 8mm                                                                                     |
| Materialer                 | Hus glasfiberforstærket højtydende plastmateriale, Tætninger NBR, Seegerringe stål, Push-in fittings messing forniklet |
| anbefalet Slangematerialer | Polyamid (PA), Polyurethan (CPU/PU), Polyethylen (PE)                                                                  |
| Medium                     | Trykluft, neutrale gasser                                                                                              |
| Medietemperatur            | -20...+70°C                                                                                                            |
| maks. driftstryk           | 15bar                                                                                                                  |

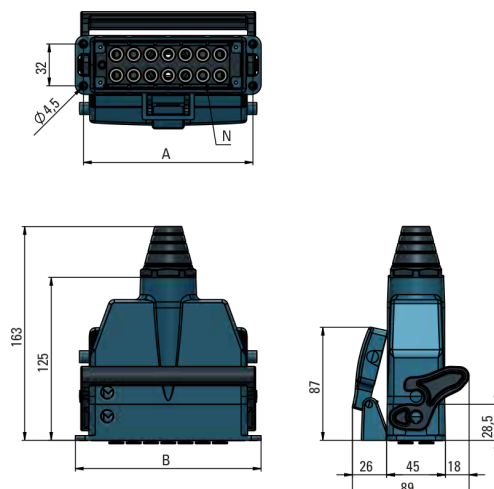

| Slangediameter [mm] | N<br>Antal koblinger | A     | B     | Vægt [g] | Type            |
|---------------------|----------------------|-------|-------|----------|-----------------|
| 4                   | 12                   | 103   | 115,5 | 612      | COM-PI12X04-N-A |
| 4                   | 20                   | 129,5 | 142,5 | 825      | COM-PI20X04-N-A |
| 6                   | 10                   | 103   | 115,5 | 718      | COM-PI10X06-N-A |
| 6                   | 14                   | 129,5 | 142,5 | 923      | COM-PI14X06-N-A |
| 8                   | 8                    | 103   | 115,5 | 656      | COM-PI8X08-N-A  |
| 8                   | 10                   | 129,5 | 142,5 | 801      | COM-PI10X08-N-A |

Illustrationer ikke bindende  
Konstruktions-, mål- og materialændringer forbeholdes

