


Granični prekidač za Zaporni zasun Tip MSU


MSU01A
mekaničkiMSU02/MSU05
induktivnoMSU03
induktivnoMSU04
induktivno

Karakteristične vrijednosti



Tip prekidača	Izvedba	Napajanje naponom odnosno Upravljački napon	Stupanj zaštite	Preklopna struja		Temperatura okoline [°C]	LED	Tip
				AC	DC			
Siemens 3SE5122	Otvarač / Normalno zatvoren (NC), mekanički	maks. 230VAC / 230VDC	IP66	maks. 6A	maks. 0,27A	-25...+85°C	-	MSU01A
Télémecanique XS618B1MAL2	2-žilni, zaštićeno od obrnutog polariteta, bez zaštite od kratkog spoja, Normalno zatvoren (NC), induktivno	24...240V AC ili DC	IP67	5...300mA	5-200mA	-25...+70°C	žuta	MSU02
IFM IGS208	3-žilni ili 2-žilni, Normalno zatvoren (NC), induktivno	10...30VDC	IP67	-	100mA	-25...+70°C	žuta	MSU03
IFM NG501A*	EEx ia IIC T6, Otvarač, induktivno	8,2VDC	IP67	-	-	-25...+70°C	žuta	MSU04
IFM IG0011	2-žilni, zaštićeno od obrnutog polariteta, bez zaštite od kratkog spoja, Normalno zatvoren (NC), induktivno	20...250V AC ili DC	IP67	5...250mA	5...100mA	-25...+80°C	žuta	MSU05

*Pažnja: Namur senzori moraju biti priključeni na vanjska sklopna pojačala koja promjenu stanja (promjenu struje) pretvaraju u sklopni signal.

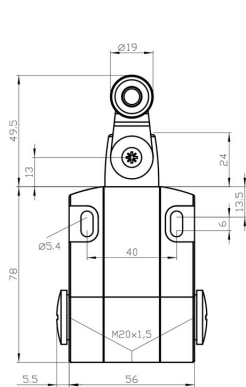Dimenzije



MSU01A





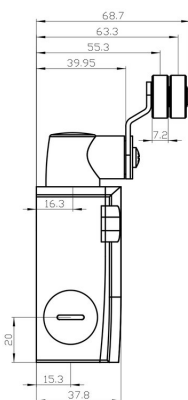


MSU02, MSU03, MSU04, MSU05

a [mm]	b [mm]	Navoj	Širina ključa [mm]	Duljina kabela [m]	Tip
-	-	-	-	-	MSU01A
60	51,5	M18	24	2	MSU02
70	49	M18	24	2	MSU03
46	30	M18	24	2	MSU04
80	58	M18	24	2	MSU05



Priključna skica

 MSU01A	 MSU02/MSU05	 MSU03 2-žilni
 MSU03 3-žilni	 MSU04	
1 = smeđa, 2 = plava, 3 = crna		

Ilustracije neobvezujuće

Zadržavamo pravo na konstrukcijske, dimenzijske i promjene materijala.

spojnice / Ventili, zaklopke i zasuni – automatski / Pribor / Električni pokazivač položaja Serija MSU

