



Flow meter for water Series FM04, FM05, FM11



Design type	Flow meter, Float measuring principle, Water scale
Connection	G3/8" ...G2"
Materials	Measuring tube PVC, Float (variable area) flowmeter PVDF, Malleable cast iron thread GJMW, Seals EPDM
Application range	liquid media without solid particles that do not attack the materials used
Medium temperature	0...+60°C
Ambient temperature	0...+60°C
max. operating pressure	10bar, see pressure-temperature diagram
Pressure drop	see table
Accuracy	see table Measurement accuracy
Mounting type	Installation in rigid piping system
Mounting position	upright, Flow from bottom to top
Special version	Thread PVC, PP or Stainless steel 1.4571, Seals FKM, Float with encapsulated magnets, Scale for other fluids
Accessories	Limit switch SG-BI-S and SG-BI-O, Measured value sensor



Dimensions FM04

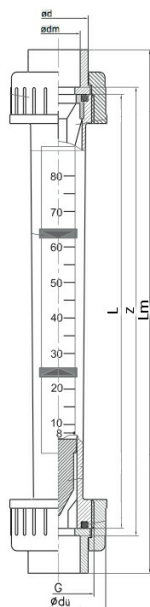

(1)...Fitting with welding spigot, (2)...Fitting with threaded sleeve

DN	G	Measuring range [l/h]	Pressure drop [mbar]	dü	L	Threaded socket			Weight [g]	Type
						dg	Lg	lg		
10	G3/4"	1,5 - 15	4,6	35	165	G3/8"	199	11	80	FM04-38-M-15
10	G3/4"	2,5 - 25	4,6	35	165	G3/8"	199	11	80	FM04-38-M-25
10	G3/4"	5 - 50	4,6	35	165	G3/8"	199	11	80	FM04-38-M-50
10	G3/4"	10 - 100	4,6	35	165	G3/8"	199	11	80	FM04-38-M-100
15	G1"	8 - 80	4,47	43	185	G1/2"	223	13	130	FM04-12-M-80
15	G1"	15 - 150	4,47	43	185	G1/2"	223	13	130	FM04-12-M-150
15	G1"	20 - 200	4,47	43	185	G1/2"	223	13	130	FM04-12-M-200
25	G1 1/2"	15 - 150	8,28	60	200	G1"	250	17	240	FM04-10-M-150
25	G1 1/2"	30 - 300	8,28	60	200	G1"	250	17	240	FM04-10-M-300
25	G1 1/2"	50 - 500	8,28	60	200	G1"	250	17	240	FM04-10-M-500
25	G1 1/2"	100 - 1000	8,28	60	200	G1"	250	17	240	FM04-10-M-1000

Special versions - Connections

DN	Measuring range [l/h]	dü	L	Adhesive socket PVC			Weld socket PP			Weld-on fitting PP			Weight [g]
				dm	z	Lm	dm	z	Lm	dg	Ls	S*	
10	1,5 - 15	35	165	16	171	199	-	-	-	-	-	-	80
10	2,5 - 25	35	165	16	171	199	-	-	-	-	-	-	80
10	5 - 50	35	165	16	171	199	-	-	-	-	-	-	80
10	10 - 100	35	165	16	171	199	-	-	-	-	-	-	80
15	8 - 80	43	185	20	191	223	19,5	195	223	20	293	1,9	130
15	15 - 150	43	185	20	191	223	19,5	195	223	20	293	1,9	130
15	20 - 200	43	185	20	191	223	19,5	195	223	20	293	1,9	130
25	15 - 150	60	200	32	206	250	31,5	210	246	32	320	3,0	240
25	30 - 300	60	200	32	206	250	31,5	210	246	32	320	3,0	240
25	50 - 500	60	200	32	206	250	31,5	210	246	32	320	3,0	240
25	100 - 1000	60	200	32	206	250	31,5	210	246	32	320	3,0	240

* Wall thickness

Version 8

192033 / Generated 2026/40 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG


www.stasto.com

Open series online

Page 2 / 6



Dimensions FM05

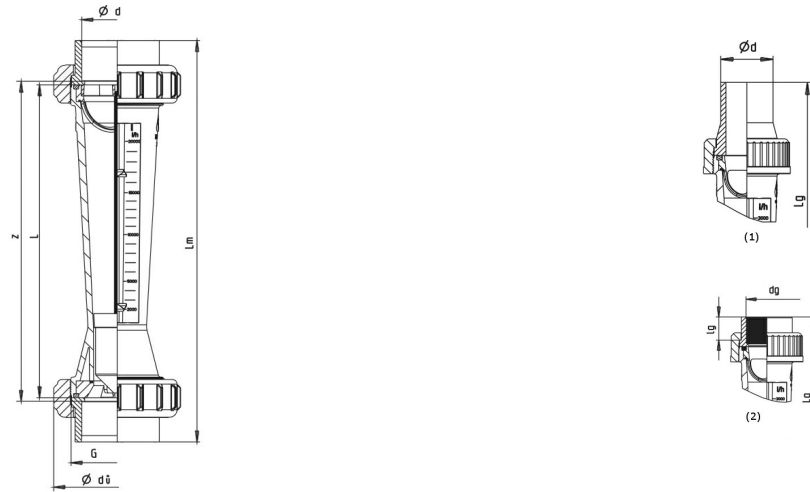

(1)...Fitting with welding spigot, (2)...Fitting with threaded sleeve

DN	G	Measuring range [l/h]	Pressure drop [mbar]	d	dÜ	L	Threaded socket			Weight [g]	Type
							dg	Lg	lg		
25	G11/2"	50 - 500	22,84	32	60	350	G1"	400	17	520	FM05-10-M-500
25	G11/2"	100 - 1000	22,84	32	60	350	G1"	400	17	520	FM05-10-M-1000
32	G2"	150 - 1500	22,84	40	72	350	G11/4"	408	19	600	FM05-114-M-1500
32	G2"	250 - 2500	22,84	40	72	350	G11/4"	408	19	600	FM05-114-M-2500
40	G21/4"	200 - 2000	24,99	50	83	350	G11/2"	418	23	1220	FM05-112-M-2000
40	G21/4"	300 - 3000	24,99	50	83	350	G11/2"	418	23	1220	FM05-112-M-3000
40	G21/4"	600 - 6000	24,99	50	83	350	G11/2"	418	23	1220	FM05-112-M-6000
50	G23/4"	600 - 6000	24,99	63	103	350	G2"	432	23	1680	FM05-20-M-6000
50	G23/4"	1000 - 10000	24,99	63	103	350	G2"	432	23	1680	FM05-20-M-10000
50	G23/4"	1500 - 15000	28,23	63	103	350	G2"	432	23	1680	FM05-20-M-15000
65	G31/2"	2000 - 20000	45,67	75	122	350	G21/2"	444	-	2900	FM05-212-M-20000
65	G31/2"	3000 - 30000	45,67	75	122	350	G21/2"	444	-	2900	FM05-212-M-30000
65	G31/2"	6000 - 60000	47,24	75	122	350	G21/2"	444	-	2900	FM05-212-M-60000

Special versions - Connections

DN	G	d	dÜ	L	Adhesive socket PVC			Weld socket PP			Weld-on fitting PP			Weight [g]
					dm	z	Lm	dm	z	Lm	d	Lg	S*	
25	G11/2"	32	60	350	32	356	400	32	360	396	32	460	2,9	520
25	G11/2"	32	60	350	32	356	400	32	360	396	32	460	2,9	520
32	G2"	40	72	350	40	356	408	40	360	400	40	476	3,7	600
32	G2"	40	72	350	40	356	408	40	360	400	40	476	3,7	600
40	G21/4"	50	83	350	50	356	418	50	360	406	50	482	4,6	1220
40	G21/4"	50	83	350	50	356	418	50	360	406	50	482	4,6	1220
40	G21/4"	50	83	350	50	356	418	50	360	406	50	482	4,6	1220
50	G23/4"	63	103	350	63	356	432	63	360	414	63	488	5,8	1680
50	G23/4"	63	103	350	63	356	432	63	360	414	63	488	5,8	1680
50	G23/4"	63	103	350	63	356	432	63	360	414	63	488	5,8	1680
65	G31/2"	75	122	350	75	356	444	75	360	422	75	602	6,9	2900
65	G31/2"	75	122	350	75	356	444	75	360	422	75	602	6,9	2900
65	G31/2"	75	122	350	75	356	444	75	360	422	75	602	6,9	2900

* Wall thickness

Version 8

192033 / Generated 2026/40 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG




www.stasto.com

Open series online

Page 3 / 6



Dimensions FM11

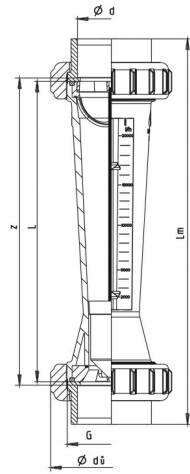

(1)...Fitting with welding spigot, (2)...Fitting with threaded sleeve

DN	G	Measuring range [l/h]	Pressure drop [mbar]	d	d _u	L	Threaded socket			Weight [g]	Type
							d _g	L _g	l _g		
25	G11/2"	50 - 500	22,8	32	60	335	G1"	385	17	520	FM11-10-M-500
25	G11/2"	100 - 1000	22,8	32	60	335	G1"	385	17	520	FM11-10-M-1000
32	G2"	150 - 1500	22,8	40	72	335	G11/4"	393	19	600	FM11-114-M-1500
32	G2"	250 - 2500	22,8	40	72	335	G11/4"	393	19	600	FM11-114-M-2500
40	G21/4"	200 - 2000	25	50	83	335	G11/2"	403	23	1220	FM11-112-M-2000
40	G21/4"	300 - 3000	25	50	83	335	G11/2"	403	23	1220	FM11-112-M-3000
40	G21/4"	600 - 6000	25	50	83	335	G11/2"	403	23	1220	FM11-112-M-6000
50	G23/4"	600 - 6000	25	63	103	335	G2"	417	23	1680	FM11-20-M-6000
50	G23/4"	1000 - 10000	25	63	103	335	G2"	417	23	1680	FM11-20-M-10000
50	G23/4"	1500 - 15000	28,2	63	103	335	G2"	417	23	1680	FM11-20-M-15000
65	G31/2"	2000 - 20000	45,7	75	122	335	G21/2"	-	-	2900	FM11-212-M-20000
65	G31/2"	3000 - 30000	45,7	75	122	335	G21/2"	-	-	2900	FM11-212-M-30000
65	G31/2"	6000 - 60000	47,3	75	122	335	G21/2"	-	-	2900	FM11-212-M-60000

Special versions - Connections

DN	Measuring range [l/h]	d	d _u	L	Adhesive socket PVC			Weld socket PP			Weld-on fitting PP			Weight [g]
					d _m	z	L _m	d _m	z	L _m	d	L _g	S*	
25	50 - 500	32	60	335	32	341	385	32	345	381	32	455	2,9	520
25	100 - 1000	32	60	335	32	341	385	32	345	381	32	455	2,9	520
32	150 - 1500	40	72	335	40	341	393	40	345	385	40	461	3,7	600
32	250 - 2500	40	72	335	40	341	393	40	345	385	40	461	3,7	600
40	200 - 2000	50	83	335	50	341	403	50	345	391	50	467	4,6	1220
40	300 - 3000	50	83	335	50	341	403	50	345	391	50	467	4,6	1220
40	600 - 6000	50	83	335	50	341	403	50	345	391	50	467	4,6	1220
50	600 - 6000	63	103	335	63	341	417	63	345	399	63	473	5,8	1680
50	1000 - 10000	63	103	335	63	341	417	63	345	399	63	473	5,8	1680
50	1500 - 15000	63	103	335	63	341	417	63	345	399	63	473	5,8	1680
65	2000 - 20000	75	122	335	75	341	429	75	345	407	75	587	6,9	2900
65	3000 - 30000	75	122	335	75	341	429	75	345	407	75	587	6,9	2900
65	6000 - 60000	75	122	335	75	341	429	75	345	407	75	587	6,9	2900

* Wall thickness

Version 8

192033 / Generated 2026/40 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com


Open series online


Page 4 / 6



Accessories - Limit switch SG-BI-S and SG-BI-O








*Pin assignment Reed switch

Function	Normally closed or normally open bistable
Switching states	SG-BI-O (Normally open): Float above open, Float below closed SG-BI-S (Normally closed (NC)): Float above closed, Float below open
Operating voltage	max. 230VAC
Switching current	max. 0,5A
Switching capacity	max. 10W / 12VA
Ambient temperature	0...+55°C
Degree of protection	IP65
Switch-on and switch-off hysteresis	1...2mm Float travel

Accessories - Measured value sensor ZAT-300

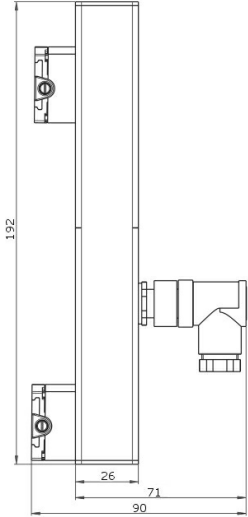

Pin 1: 12-24VDC

Pin 2: 4-20mA


Pin 1: 0V

Operating voltage	12VDC... 24VDC (±10%)
Output	analog, 4mA... 20mA
Accuracy	<1%
Ambient temperature	0... +50°C
Degree of protection	IP65
Connection	Connector after DIN 43650
Burden resistance	max. 500Ohm

Measurement accuracy

Flow rate [%]	10	20	30	40	50	60	70	80	90	100
Total error of measured value [%]	13,00	8,00	6,33	5,50	5,00	4,67	4,43	4,25	4,11	4,00
Total error of full-scale value [%]	1,3	1,6	1,9	2,2	2,5	2,8	3,1	3,4	3,7	4,0

Pressure-temperature diagram

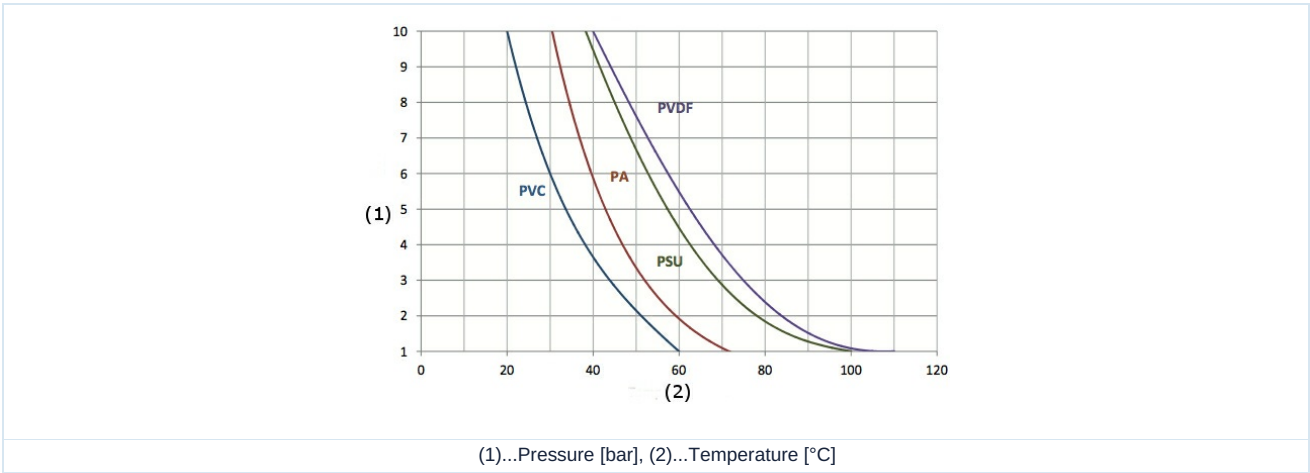

Illustrations non-binding Design, dimensional and material changes reserved

Armatures / Pressure switches, measuring instruments and flow monitors / Flow meter / Flow meter Series FM04/FM05