


Pneumatic preset counter Type PC004-5




Design type	5-digit pulse counter, subtractive, Digit height 4mm
Connection	Push-in fitting for hose outside diameter 4 mm
Medium	filtered and non-lubricated compressed air
Operating temperature	0...+60°C
Operating pressure	2...8bar
Mounting type	Front panel
Mounting position	Display horizontal
Counting frequency	max. 20Hz
Resetting	via mechanical pushbutton in the front panel or pneumatic return spring
min. return pressure	2...8bar
Degree of protection	IP40 with correctly installed hoses
Pulse duration min.	8ms
Output signal	upon reaching of 00000
Weight	136g
Application note	The count and reset pulses of the preset counter must never occur simultaneously. The preset can be changed during operation without requiring a reset. The time between the last counting pulse and a pneumatic reset must be at least 50 ms.

Dimensional drawing

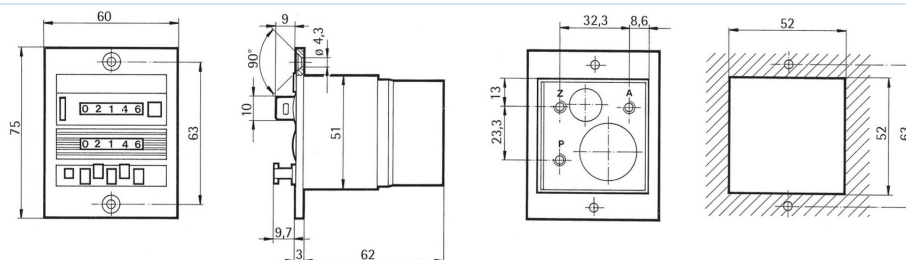

Connection diagram

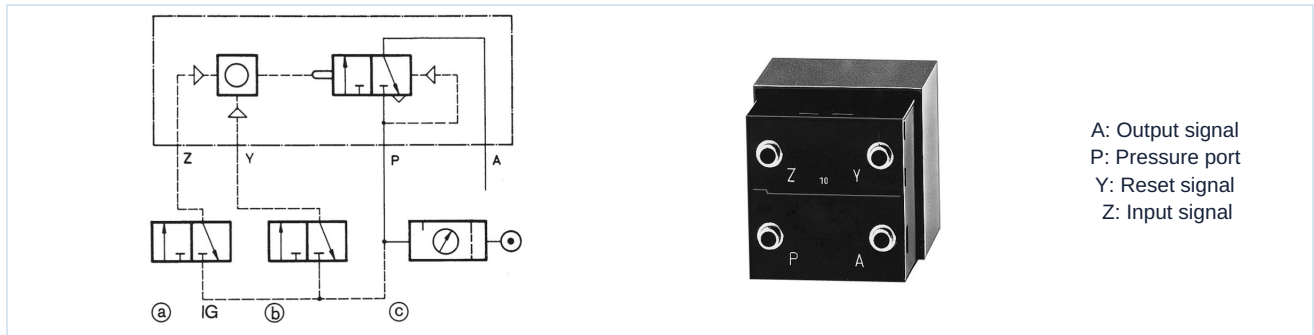

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Way-valves - mechanically / manually, logic units / Pneumatic timers and automatic valves / Pneumatic preset counter / [PC004-5] PC004-5

Version 4

195300 / Generated 2026/33 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Open series online

Page 2 / 2

