

Partnership. With Guarantee.

3-Way stainless steel flanged ball valve
Type BA305-25-LLD-A0H3C



Design type	Three-way ball valve with floating ball, full bore passage, Ball sealed on all sides, non-overlapping
Actuation	by 90° rotation of the hand lever
Connection	rotatable flanges according to EN1092-1
Materials	Housing Stainless steel AISI316L polished, Ball Stainless steel AISI316L, Stainless steel hand lever 1.4307 plasticized, Ball seal MPTFE, Spindle seal PTFE, O-ring EPDM-Peroxide
Application range	Fluids and gases of group 1 and 2 in accordance with PED 2014/68/EU that do not attack the materials used.
Medium temperature	-45...+150°C
Mounting type	Installation in rigid piping system
Mounting position	any
Special version	Hand lever with shut-off device oil- and grease-free version for hydrogen and oxygen
Approvals	Mill test certificate 3.1 ATEX II 2G Ex h IIC T4 Gb / II 2D Ex h IIIC T135°C Db

Dimensions

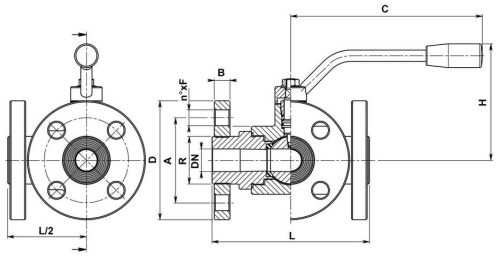

Nominal size DN[mm]	Flange according to EN1092-1	max. Operating pressure [bar]	H	D	F	L	R	A	C	B	Kv value [m 3 /h]	Weight [approx. kg]	Ball bore
25	PN40	40	110	115	4 x Ø14	150	51	85	170	14	64,5	6,18	T
2514.V90-QM22													

Illustrations non-binding Design, dimensional and material changes reserved

Version 8
212237 / Generated 2026/41 EN
MADE IN EUROPE

+43 512 52076
austria@stasto.eu
© STASTO Automation KG