
Partnership. With Guarantee.

Stainless steel flanged ball valve
Type BA895-GLD-0H



Design type	Full port ball valve with floating ball, full bore passage
Actuation	Handwheel gearbox
Connection	rotatable flanges according to EN1092-1
Materials	Housing Stainless steel AISI316L polished, Ball Stainless steel AISI316L, Ball seal MPTFE, Spindle seal PTFE, O-ring EPDM, Gearbox Aluminium housing
Application range	Fluids and gases of group 1 and 2 in accordance with PED 2014/68/EU that do not attack the materials used.
Medium temperature	-45...+150°C
Mounting type	Installation in rigid piping system
Mounting position	any
Special version	Gearbox with shut-off device oil- and grease-free version for hydrogen and oxygen
Approvals	Mill test certificate 3.1 ATEX II 2G Ex h IIC T4 Gb / II 2D Ex h IIIC T135°C Db

Dimensions

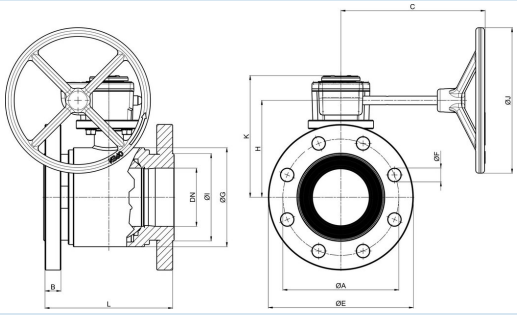

Nominal size DN[mm]	Flange according to EN1092-1	max. Operating pressure [bar]	A	B	C	ØE	F	ØG	H	ØI	ØJ	L	K	Kv value [m 3 /h]	Weight [approx. kg]	Type
80	PN16/PN40	16	160	18	199	200	8 x Ø18	136	133	120	200	180	167,5	770	-	BA895-80-GLD-A0H3C
2111.V90-QM21 2111.V90-QM23																

Illustrations non-binding Design, dimensional and material changes reserved

Version 8
212297 / Generated 2026/41 EN
MADE IN EUROPE

+43 512 52076
austria@stasto.eu
© STASTO Automation KG