Partnership. With Guarantee.

Pressure switch
Series PDS/HDS





Design type	Diaphragm pressure switch or rather Piston pressure switch with Changeover contact
Connection	Type PDS: G1/4" Female thread Type HDS: G1/4" Male thread swivelable
Materials	Body Zinc die casting, Diaphragm or piston seal NBR
Application range	Compressed air, Hydraulic oil, Water
Switching point adjustment	The switching point can be adjusted using the handwheel after loosening a lateral grub screw.
Reset differential	Type PDS: 0,1bar + 5...10% x Switching point Type HDS: 5bar + 5...10% x Switching point
Medium temperature	-20...+80°C
Ambient temperature	-20...+80°C
electrical connection	connector according to EN175301-803 Form A
Degree of protection	IP65 according to EN 60529 with correctly mounted device connector (protection against dust ingress and water jets)
Switching cycles	1 million switching cycles
maximum switching frequency	1Hz
Mounting	via threaded connection or via 2 through holes in the housing
Mounting position	any
Scope of delivery	Pressure switch including device socket according to EN175301-803 Form A
Special version	with electrical connection M12x1 (IP67), Indicator lamp socket, silicone-free


Adjustment range [bar]	Overpressure safety [bar]	Pressure transmission	Weight [kg]	Type
0,2-2	60	Diaphragm	0,31	PDS-1-002-M-2-1
0,5-8	60	Diaphragm	0,31	PDS-1-008-M-2-1
1-16	60	Diaphragm	0,31	PDS-1-016-M-2-1
10-80	350	Piston	0,34	HDS-1-080-K-7-1
10-120	350	Piston	0,34	HDS-1-120-K-7-1
20-200	350	Piston	0,34	HDS-1-200-K-7-1
20-250	350	Piston	0,34	HDS-1-250-K-7-1
30-320	350	Piston	0,34	HDS-1-320-K-7-1

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

Switching capacities


	Type PDS		Type HDS	
Voltage [V]	250AC	24DC	250AC	24DC
Resistive load [A]	6	3	6	4
Inductive load [A]	1	1	2	1

Electrical connection

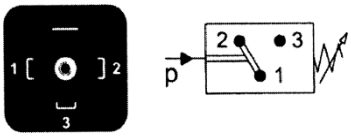


Dimensions

Type PDS

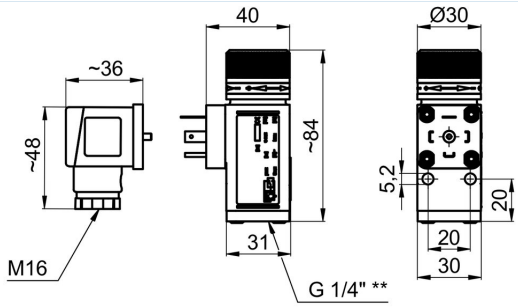

Type HDS

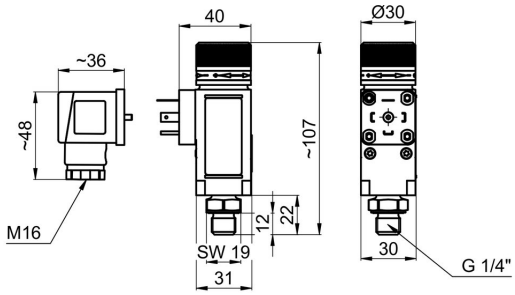

**Depth 11mm

Illustrations non-binding
Design, dimensional and material changes reserved

+43 512 52076
austria@stasto.eu
© STASTO Automation KG