Partnership. With Guarantee.

Pressure relief valve made of red brass, not component-tested
Series RV27




Design type	Spring-loaded proportional pressure relief valve The upper part is completely closed to the outside, so that this type is also suitable as an overflow valve even in the event of back pressure. Adjustment is carried out from the outside by means of an internal hexagon screw according to the respective adjustment range. The set pressure can be secured against adjustment by the seal. These types are not factory-set.
Connection	G3/8"...G2"
Materials	Valve body Red brass, Internal parts Brass or rather stainless steel, Seals NBR, EPDM, FKM or PTFE/FKM Adjustment range 12...20bar Seal PTFE/FKM
Medium temperature	see table
Mounting type	Installation in rigid piping system
Mounting position	preferably upright
Adjustment range	0,2...0,8 / 0,5...2,5bar / 2...8bar / 2...12bar / 12...20bar
Application range	gaseous and liquid media that do not attack the materials used
Ordering note	Adjustment range must be specified
Special version	preset, Oxygen version

Table:

Seal	Adjustment range [bar]	Medium temperature [°C]	Type
NBR	0,2...0,8 / 0,5...2,5 / 2...8 / 2...12	-30...+130	RV27
EPDM	0,2...0,8 / 0,5...2,5 / 2...8 / 2...12	-50...+150	RV27-...-E
FKM	0,2...0,8 / 0,5...2,5 / 2...8 / 2...12	-20...+200	RV27-...-V
PTFE/FKM	0,2...0,8 / 0,5..2,5 / 2...8 / 2...12 / 12...20	-60...+225	RV27-...-T

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

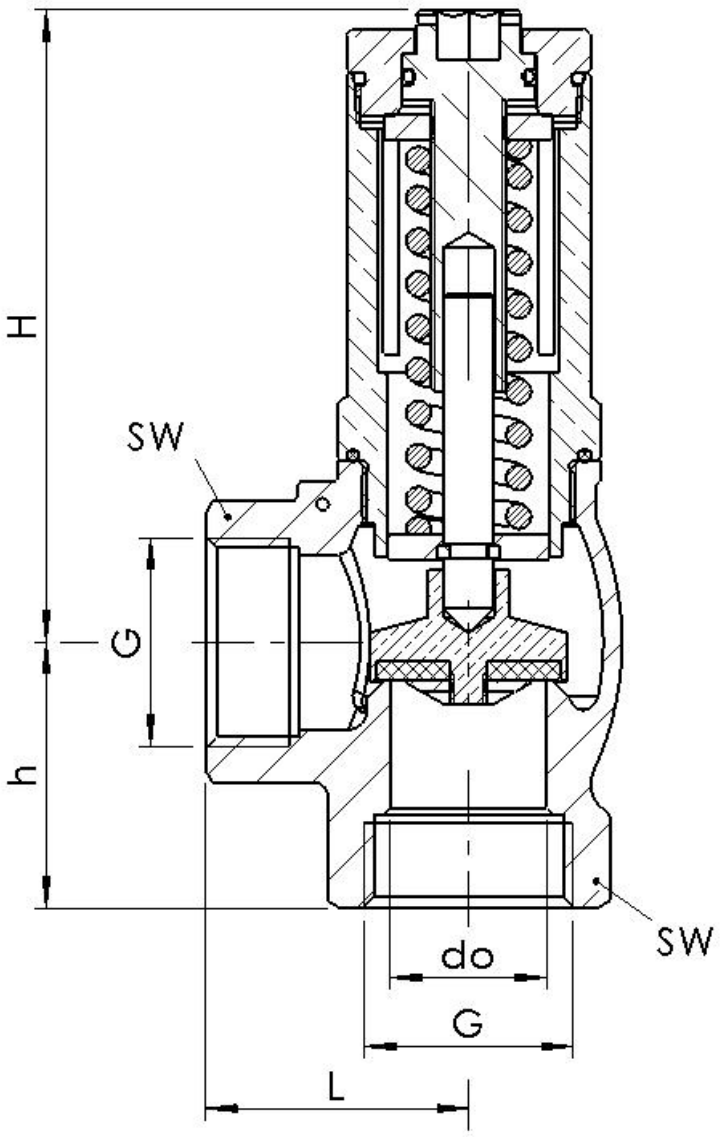

G	d_0	H	h	L	SW	Weight [approx. kg]	Type	Type
G3/8"	10	60	26	27	24	0,3	RV27-38-10-XX	RV27-38-10-XX-T
G1/2"	13	69	30	30	28	0,4	RV27-12-13-XX	RV27-12-13-XX-T
G3/4"	19	86	35	33	34	0,7	RV27-34-19-XX	RV27-34-19-XX-T
G1"	25	101	41	40	41	1,2	RV27-10-25-XX	RV27-10-25-XX-T
G11/4"	30	118	45	45	52	1,9	RV27-114-30-XX	RV27-114-30-XX-T
G11/2"	38	139	51	50	58	2,5	RV27-112-38-XX	RV27-112-38-XX-T
G2"	50	149	60	60	70	3,8	RV27-20-50-XX	RV27-20-50-XX-T

XX - Adjustment range 0,2/0,8 0,5/2,5 2/8 2/12 12/20

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

Exhaust capacity at 1 bar overpressure for Water [m ^{3} /h]

Set pressure [bar]	Size																			
	G3/8"					G1/2"					G3/4"					G1"				
	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20
0,2	2,7	-	-	-	-	4,4	-	-	-	-	5,6	-	-	-	-	6,0	-	-	-	-
0,5	2,9	2,7	-	-	-	4,6	4,3	-	-	-	5,6	6,1	-	-	-	6,4	10,8	-	-	-
0,8	2,9	2,8	-	-	-	4,9	4,5	-	-	-	5,6	5,3	-	-	-	7,1	11,5	-	-	-
1	-	3,0	-	-	-	-	4,6	-	-	-	-	6,5	-	-	-	-	11,9	-	-	-
1,5	-	3,2	-	-	-		4,8	-	-	-	-	6,7	-	-	-	-	12,6	-	-	-
2	-	3,4	1,9	1,6	-	-	5,0	2,2	1,8	-	-	6,9	4,5	3,7	-	-	13,0	8,5	4,2	-
2,5	-	3,7	2,2	1,7	-	-	5,2	2,1	1,8	-	-	7,3	4,8	3,8	-	-	13,7	8,9	4,3	-
3	-	-	2,3	1,9	-	-	-	1,9	1,8	-	-	-	5,2	4,1	-	-	-	9,3	4,3	-
4	-	-	2,7	2,2	-	-	-	1,6	1,7	-	-	-	5,7	4,6	-	-	-	10,0	4,5	-
5	-	-	2,9	2,5	-	-	-	1,4	1.6	-	-	-	6,5	5,1	-	-	-	10,4	4,6	-
6	-	-	3,4	2,8	-	-	-	1,3	1,5	-	-	-	7,1	6,1	-	-	-	11,0	4,7	-
7	-	-	3,6	2,9	-	-	-	1,1	1,5	-	-	-	7,9	6,5	-	-	-	11,2	5,0	-
8	-	-	3,9	3,1	-	-	-	1,0	1,4	-	-	-	8,5	7,1	-	-	-	11,3	5,1	-
9	-	-	-	3,2	-	-	-	-	1,4	-	-	-	-	7,3	-	-	-	-	5,3	-
10	-	-	-	3,4	-	-	-	-	1,4	-	-	-	-	8,3	-	-	-	-	5,5	-
11	-	-	-	3,5	-	-	-	-	1,4	-	-	-	-	9,1	-	-	-	-	5,8	-
12	-	-	-	3,7	1,7	-	-	-	1,3	0,4	-	-	-	9,3	2,8	-	-	-	5,9	2,2
13	-	-	-	-	1,4	-	-	-	-	0,4	-	-	-	-	2,4	-	-	-	-	2,2
14	-	-	-	-	1,3	-	-	-	-	0,5	-	-	-	-	2,2	-	-	-	-	1,9
15	-	-	-	-	1,1	-	-	-	-	0,5	-	-	-	-	1,7	-	-	-	-	1,6
16	-	-	-	-	0,8	-	-	-	-	0,5	-	-	-	-	1,4	-	-	-	-	1,3
17	-	-	-	-	0,6	-	-	-	-	0,5	-	-	-	-	1,1	-	-	-	-	1,1
18	-	-	-	-	0,4	-	-	-	-	0,6	-	-	-	-	0,9	-	-	-	-	1,0
19	-	-	-	-	0,2	-	-	-	-	0,6	-	-	-	-	0,7	-	-	-	-	0,8
20	-	-	-	-	0,2	-	-	-	-	0,6	-	-	-	-	0,7	-	-	-	-	0,7

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

Exhaust capacity at 1 bar overpressure for Water [m ^{3} /h]

Set pressure [bar]	Size														
	G11/4"					G11/2					G2"				
	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20
0,2	18,3	-	-	-	-	29,0	-	-	-	-	41,0	-	-	-	-
0,5	19,5	16,0	-	-	-	29,0	21,7	-	-	-	44,4	31,6	-	-	-
0,8	20,0	16,4	-	-	-	29,0	22,6	-	-	-	47,0	34,0	-	-	-
1	-	16,7	-	-	-	-	23,3	-	-	-	-	35,6	-	-	-
1,5	-	17,5	-	-	-	-	24,0	-	-	-	-	37,7	-	-	-
2	-	18,1	7,6	6,2	-	-	25,2	10,9	8,8	-	-	40,6	24,3	17,9	-
2,5	-	18,9	7,5	6,2	-	-	26,1	11,3	9,1	-	-	43,0	26,2	19,4	-
3	-	-	7,4	6,1	-	-	-	11,8	9,3	-	-	-	28,2	21,1	-
4	-	-	7,3	6,1	-	-	-	12,2	9,7	-	-	-	31,3	24,7	-
5	-	-	7,2	6,0	-	-	-	12,5	10,3	-	-	-	34,7	28,9	-
6	-	-	7,0	5,9	-	-	-	12,8	10,6	-	-	-	36,3	30,1	-
7	-	-	6,7	5,8	-	-	-	13,7	11,9	-	-	-	41,1	31,7	-
8	-	-	6,5	5,6	-	-	-	15,1	13,1	-	-	-	47,4	34,2	-
9	-	-	-	5,5	-	-	-	-	14,3	-	-	-	-	37,5	-
10	-	-	-	5,3	-	-	-	-	15,7	-	-	-	-	39,3	-
11	-	-	-	5,2	-	-	-	-	17,2	-	-	-	-	42,4	-
12	-	-	-	5,0	6,8	-	-	-	17,6	10,1	-	-	-	43,9	18,9
13	-	-	-	-	6,5	-	-	-	-	10,3	-	-	-	-	21,2
14	-	-	-	-	6,3	-	-	-	-	10,5	-	-	-	-	24,1
15	-	-	-	-	6,1	-	-	-	-	10,6	-	-	-	-	25,7
16	-	-	-	-	6,0	-	-	-	-	10,9	-	-	-	-	27,6
17	-	-	-	-	5,8	-	-	-	-	11,0	-	-	-	-	29,3
18	-	-	-	-	5,6	-	-	-	-	11,3	-	-	-	-	31,8
19	-	-	-	-	5,1	-	-	-	-	11,4	-	-	-	-	34,6
20	-	-	-	-	5,0	-	-	-	-	11,5	-	-	-	-	36,6

Exhaust capacity at 1 bar overpressure for Air [Nm ^{3} /h]

Set pressure [bar]	Size																			
	G3/8"					G1/2"					G3/4"					G1"				
	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20
0,2	24	-	-	-	-	53	-	-	-	-	177	-	-	-	-	200	-	-	-	-
0,5	28	83	-	-	-	61	147	-	-	-	200	209	-	-	-	220	375	-	-	-
0,8	32	90	-	-	-	67	153	-	-	-	220	220	-	-	-	245	384	-	-	-
1	-	95	-	-	-	-	158	-	-	-	-	228	-	-	-	-	390	-	-	-
1,5	-	101	-	-	-	-	173	-	-	-	-	257	-	-	-	-	433	-	-	-
2	-	111	68	48	-	-	180	126	86	-	-	287	180	159	-	-	462	335	302	-
2,5	-	119	68	50	-	-	202	132	89	-	-	306	197	168	-	-	495	351	311	-
3	-	-	75	51	-	-	-	143	95	-	-	-	226	188	-	-	-	376	322	-
4	-	-	83	62	-	-	-	166	101	-	-	-	239	213	-	-	-	423	341	-
5	-	-	95	80	-	-	-	169	105	-	-	-	233	105	-	-	-	466	242	-
6	-	-	101	90	-	-	-	173	111	-	-	-	269	250	-	-	-	402	380	-
7	-	-	106	96	-	-	-	150	118	-	-	-	303	257	-	-	-	398	391	-
8	-	-	112	114	-	-	-	139	117	-	-	-	324	314	-	-	-	391	347	-
9	-	-	-	115	-	-	-	-	123	-	-	-	-	324	-	-	-	-	301	-
10	-	-	-	122	-	-	-	-	133	-	-	-	-	331	-	-	-	-	288	-

© STASTO Automation KG

Set pressure [bar]	Size																			
	G3/8"					G1/2"					G3/4"					G1"				
	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20
11	-	-	-	121	-	-	-	-	138	-	-	-	-	339	-	-	-	-	274	-
12	-	-	-	126	96	-	-	-	138	112	-	-	-	351	221	-	-	-	261	305
13	-	-	-	-	109	-	-	-	-	103	-	-	-	-	206	-	-	-	-	291
14	-	-	-	-	116	-	-	-	-	94	-	-	-	-	166	-	-	-	-	282
15	-	-	-	-	120	-	-	-	-	85	-	-	-	-	140	-	-	-	-	269
16	-	-	-	-	122	-	-	-	-	76	-	-	-	-	132	-	-	-	-	257
17	-	-	-	-	124	-	-	-	-	57	-	-	-	-	115	-	-	-	-	245
18	-	-	-	-	129	-	-	-	-	56	-	-	-	-	84	-	-	-	-	233
19	-	-	-	-	134	-	-	-	-	44	-	-	-	-	50	-	-	-	-	220
20	-	-	-	-	140	-	-	-	-	36	-	-	-	-	45	-	-	-	-	208

Exhaust capacity at 1 bar overpressure for Air [Nm ^{3} /h]

Set pressure [bar]	Size														
	G11/4"					G11/2					G2"				
	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20	0,2 - 0,8	0,5 - 2,5	2 - 8	2 - 12	12 - 20
0,2	600	-	-	-	-	930	-	-	-	-	1500	-	-	-	-
0,5	680	717	-	-	-	970	847	-	-	-	1620	1376	-	-	-
0,8	700	771	-	-	-	1050	878	-	-	-	1740	1478	-	-	-
1	-	808	-	-	-	-	899	-	-	-	-	1546	-	-	-
1,5	-	901	-	-	-	-	1033	-	-	-	-	1734	-	-	-
2	-	977	353	233	-	-	1104	552	426	-	-	1904	1001	788	-
2,5	-	1031	361	257	-	-	1205	564	447	-	-	1953	1082	802	-
3	-	-	369	272	-	-	-	577	481	-	-	-	1170	821	-
4	-	-	417	311	-	-	-	601	527	-	-	-	1339	878	-
5	-	-	459	361	-	-	-	726	352	-	-	-	1508	942	-
6	-	-	502	397	-	-	-	893	597	-	-	-	1846	994	-
7	-	-	549	437	-	-	-	994	764	-	-	-	2224	1050	-
8	-	-	606	492	-	-	-	1113	910	-	-	-	2666	1123	-
9	-	-	-	546	-	-	-	-	949	-	-	-	-	1187	-
10	-	-	-	600	-	-	-	-	1023	-	-	-	-	1280	-
11	-	-	-	569	-	-	-	-	1070	-	-	-	-	1358	-
12	-	-	-	538	594	-	-	-	1095	682		-	-	1480	1237
13	-	-	-	-	625	-	-	-	-	758	-	-	-	-	1277
14	-	-	-	-	656	-	-	-	-	834	-	-	-	-	1388
15	-	-	-	-	687	-	-	-	-	911	-	-	-	-	1499
16	-	-	-	-	716	-	-	-	-	987	-	-	-	-	1609
17	-	-	-	-	737	-	-	-	-	954	-	-	-	-	1821
18	-	-	-	-	758	-	-	-	-	922	-	-	-	-	2033
19	-	-	-	-	779	-	-	-	-	889	-	-	-	-	2245
20	-	-	-	-	801	-	-	-	-	851	-	-	-	-	2357

Illustrations non-binding
Design, dimensional and material changes reserved

+43 512 52076
austria@stasto.eu
© STASTO Automation KG