

Shut-off valve stainless steel DN15 up to DN200 Series 8906VA




Design type	Shut-off valve, straight-through design with back seal and Stuffing box packing, metal-to-metal sealing, rising stem
Connection	Flanges DN15...DN200 according to EN1092-1 PN40
Materials	Housing 1.4408, Seat, Cone and Spindle Stainless steel 1.4401, Handwheel Steel, Package Graphite
Mounting type	Installation in rigid piping system
Mounting position	any
Application range	Fluids and gases of group 1 and 2 in accordance with PED 2014/68/EU that do not attack the materials used.
Medium temperature	-10...+400°C
Operating pressure	Nominal pressure according to the pressure-temperature table
Actuation	via steel handwheel
Overall length	corresponding DIN EN558-1R1
Approvals	GOST, ATEX on request
Special versions	Throttle cone, Cone with soft seal

Pressure-temperature table in bar

-10...+40°C	100°C	150°C	200°C	250°C	300°C	350°C	400°C
40	32	29	26	24	22	21	20

Intermediate values of the maximum operating pressures may be calculated by linear interpolation between the nearest lower and higher temperature values.



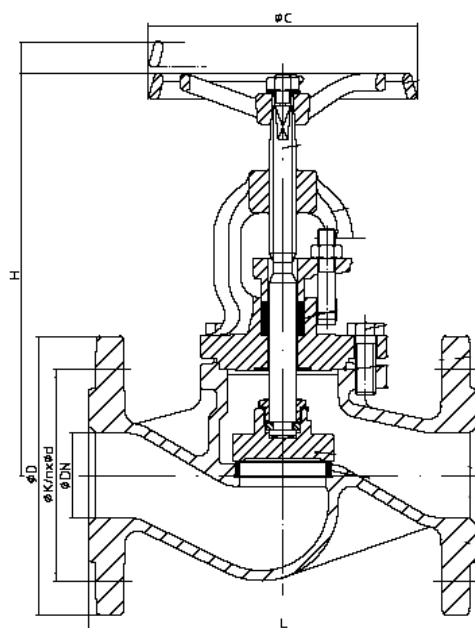

Nominal size DN[mm]	PN [bar]	C	D	H*	K	L	nx d	Kv value [m ³ / h]	Weight [approx. kg]	Type
15	40	120	95	200	65	130	4 x Ø14	5,1	4,2	8906VA-15-40
20	40	120	105	210	75	150	4 x Ø14	7,1	4,7	8906VA-20-40
25	40	120	115	220	85	160	4 x Ø14	8,7	6,1	8906VA-25-40
32	40	160	140	230	100	180	4 x Ø18	16,3	7,3	8906VA-32-40
40	40	160	150	265	110	200	4 x Ø18	32	10,6	8906VA-40-40
50	40	160	165	295	125	230	4 x Ø18	42	12,2	8906VA-50-40
65	40	200	185	340	145	290	8 x Ø18	80	21,1	8906VA-65-40
80	40	250	200	360	160	310	8 x Ø18	115	26,4	8906VA-80-40
100	40	250	235	410	190	350	8 x Ø22	183	35,6	8906VA-100-40
125	40	315	270	440	220	400	8 x Ø26	267	57	8906VA-125-40
150	40	315	300	490	250	480	8 x Ø26	368	81	8906VA-150-40
200	40	400	375	610	320	600	12 x Ø30	630	130	8906VA-200-40

* Height in open position

Illustrations non-binding
Design, dimensional and material changes reserved

Armatures / Valves, butterfly valves and gate valves - manually operated / Other materials - A04 / Globe valve Series 8906VA

