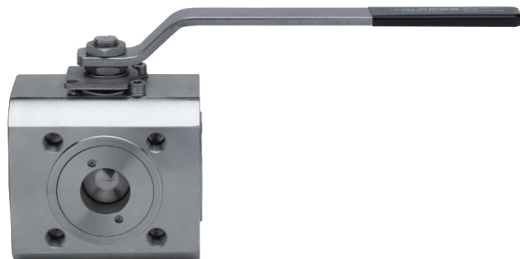














3-Putni prirubnički kuglasti ventili od nerđajućeg čelika

Serijska BA062, BA063



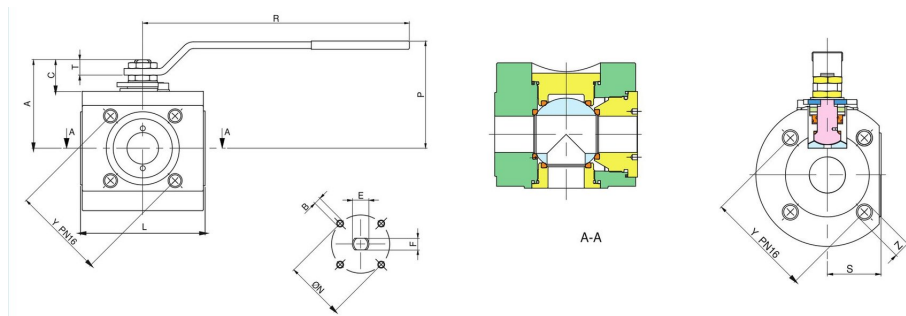
Konstrukcija	Trosmerni kuglasti ventil sa plivajućom kuglom, puni prolaz, troslojno zaptivno, nije bez preklapanja
Aktiviranje	okretanjem ručne poluge za 90°
Priključak	rotirajuće prirubnice DN15...DN100 prema EN1092-1 PN16
Materijali	Kućište i kugla od nerđajućeg čelika 1.4401, Kuglična zaptivka PTFE, Zaptivka vretena V-Pack PTFE/GRAPHOIL, O-prstenovi FKM, Ručna poluga od nerđajućeg čelika
Područje primene	Tečnosti i gasovi grupe 1 i 2 u skladu sa PED 2014/68/EU, koji ne napadaju korišćene materijale. Za primene sa parom preporučujemo upotrebu specijalnih parnih slavina.
Temperatura medijuma	-20...+160°C
Radni pritisak	Vakuum maks. 10 ⁻³ Torr do Nazivni pritisak prema tabeli i dijagramu pritisak-temperatura
Način pričvršćivanja	Ugradnja u kruti cevovodni sistem
Položaj ugradnje	proizvoljno
Odobrenja	ATEX EX II 2 G/D c T3, TA-Luft

Šema preklapanja

BA063				BA062		
Način preklapanja 01	Način preklapanja 02	Način preklapanja 03	Način preklapanja 04	Način preklapanja 05	Način preklapanja 06	Način preklapanja 07
Pozicija 1						
						
Pozicija 2						
						
Ručice se mogu pojedinačno premestiti za 90°. Nakon uklanjanja centralnih pričvršćnih vijaka na gornjoj strani vretena postaje vidljivo udubljenje koje označava položaj kugle i iz kojeg se takođe može prepoznati tip slavine.						



Dimenzije

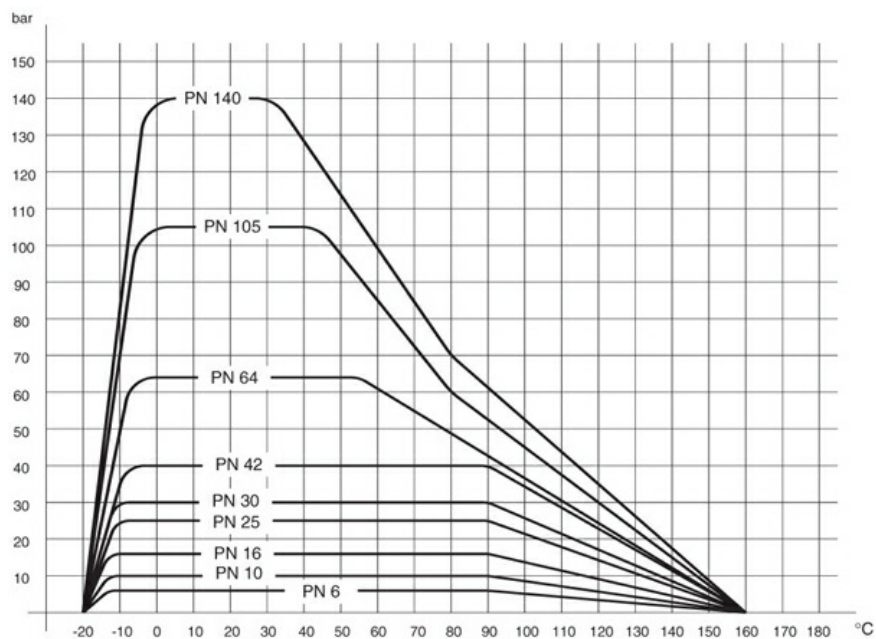


Nazivni prečnik DN[mm]	A	B	C	E	F	L	N	P	R	S	T	Y	Z
15	55	4 x M5	20	M10	7	99	42	73	131,5	35	10	65	4 x M12
20	72	4 x M6	28	M12	8	108	50	90	174	40	13	75	4 x M12
25	76	4 x M6	27	M12	8	115	50	95	174	41,5	12	85	4 x M12
32	92	4 x M6	31	M16	10	140	50	116	250	52,5	13	100	4 x M16
40	107	4 x M8	38	M20	14	150	70	129	321	56,5	18,5	110	4 x M16
50	115	4 x M8	38	M20	14	167	70	137	321	62	18,5	125	4 x M16
65	131	4 x M8	41	M20	14	185	70	150	321	85	22,5	145	4 x M16
80	147	4 x M10	40	M24	18	216	102	171	381	127	18	160	8 x M16
100	169	4 x M10	39	M24	18	244	102	192	381	150	18	180	8 x M16

DN [mm]	PN [bar]	Kv vrednost [m ³ /h]	Težina [pribl. kg]	Tip T-provrtina	Tip L-provrtina
15	16	7,6	3,7	BA063-15-L-A	BA062-15-L-A
20	16	12,2	5,5	BA063-20-L-A	BA062-20-L-A
25	16	21,1	7	BA063-25-L-A	BA062-25-L-A
32	16	34,6	12,5	BA063-32-L-A	BA062-32-L-A
40	16	48,8	16,5	BA063-40-L-A	BA062-40-L-A
50	16	85,1	22,5	BA063-50-L-A	BA062-50-L-A
65	16	138,4	37	BA063-65-L-A	BA062-65-L-A
80	16	220,1	60	BA063-80-L-A	BA062-80-L-A
100	16	381,1	95	BA063-100-L-A	BA062-100-L-A



Dijagram pritisak-temperatura



Ilustracije nisu obavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i promene materijala.

Armature / kuglasti ventili / Drugi materijali - A02 / kuglasti ventil sa priрубnicom serije BA062-L-A, BA063-L-A

Verzija 1.0

260474 / Generisano 2026/33 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Strana 3 / 3

