
Partnership. With Guarantee.

Manifold strip with integrated ball valves Series KPV

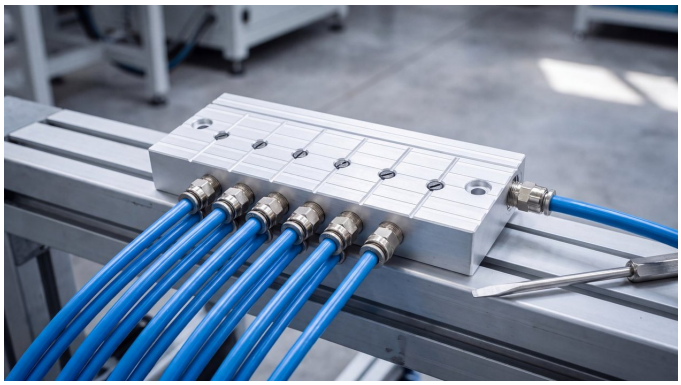

Specifications

Connection	G3/8"
Outlets	G1/4", single-sided
Number of outlets	6 or rather 10
Pressure range	Vacuum up to 10bar
Medium temperature	-10...+100°C
Actuation	using a screwdriver
Mounting type	Installation in piping system or via mounting holes

Your advantages

Ball valve on each outlet	Each outlet has its own ball valve. You shut off exactly the line you are working on, and the other consumers continue running.
A rail instead of manifolds and valves	Distribution and shut-off are housed in an aluminum block. This saves components, sealing points and space.
Operation with screwdriver	No lever protrudes, nothing is accidentally adjusted.

Applications

- Compressed air distribution on machines and systems
- Control cabinet
- Vacuum technology
- Test and laboratory stations
- Assembly workstations
- Maintenance and modification during operation

Versions



Type	Number of outlets	Outlets	Length [mm]	Weight [approx. g]
KPV-5226-6E	6	G1/4"	175	650
KPV-5226-10E	10	G1/4"	275	890

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

Materials

Housing	Aluminium anodized
Valve ball and stem	Brass chrome-plated
Ball seal	PTFE
Stem seal and O-rings	NBR

+43 512 52076
austria@stasto.eu
© STASTO Automation KG