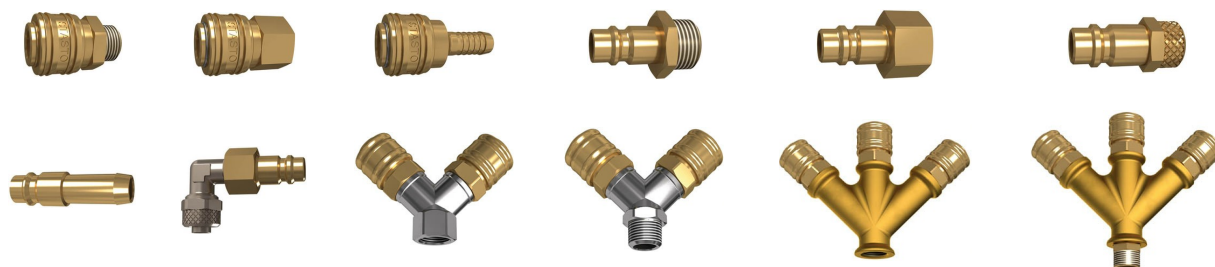



## Spojnice DN 7,2mm Seriya C0.72-B

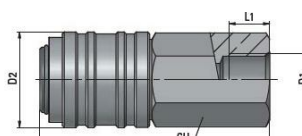


|                      |                                                                                                               |
|----------------------|---------------------------------------------------------------------------------------------------------------|
| Konstrukcija         | Spojnice - utičnice, spojnice - utikači i razvodnici višestrukih spojnih utičnica, jednostrano zaporni ventil |
| Nazivni prečnik      | DN 7,2mm                                                                                                      |
| Materijali           | Telo, ventil i konektor Mesing, Opruga od nerđajućeg čelika 1.4310, Zaptivka NBR                              |
| Nominalni protok     | 960NI/min pri 6 bar ( $\Delta p$ 0,5bar)                                                                      |
| Medij                | Komprimovani vazduh, neutralni gasovi i tečnosti                                                              |
| Temperatura medijuma | -20...+100°C                                                                                                  |
| Radni pritisak       | -0,87...35bar                                                                                                 |

### C0C72-M Utičnica spojnice - Spoljašnji navoj

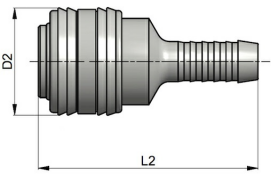
|  | D1    | D2 | L1 | L2 | CH | Težina [g] | Tip         |
|-------------------------------------------------------------------------------------|-------|----|----|----|----|------------|-------------|
|                                                                                     | G1/8" | 27 | 7  | 38 | 22 | 70         | C0C72-M18-B |
|                                                                                     | G1/4" | 27 | 9  | 39 | 22 | 73         | C0C72-M14-B |
|                                                                                     | G3/8" | 27 | 9  | 41 | 22 | 76         | C0C72-M38-B |
|                                                                                     | G1/2" | 27 | 10 | 44 | 24 | 87         | C0C72-M12-B |

### C0C72-F Utičnica spojnice - Unutrašnji navoj


|  | D1    | D2 | L1   | L2 | CH | Težina [g] | Tip         |
|-------------------------------------------------------------------------------------|-------|----|------|----|----|------------|-------------|
|                                                                                     | G1/4" | 27 | 9    | 39 | 22 | 90         | C0C72-F18-B |
|                                                                                     | G1/4" | 27 | 10,5 | 41 | 22 | 92         | C0C72-F14-B |
|                                                                                     | G3/8" | 27 | 10,5 | 41 | 22 | 85         | C0C72-F38-B |
|                                                                                     | G1/2" | 27 | 12   | 43 | 24 | 87         | C0C72-F12-B |




### C0C72-H Utičnica spojnice - Nastavak za crevo

|  | Unutrašnji prečnik creva | D2 | L2 | Težina [g] | Tip         |
|-----------------------------------------------------------------------------------|--------------------------|----|----|------------|-------------|
|                                                                                   | 6                        | 27 | 55 | 64         | C0C72-H06-B |
|                                                                                   | 8                        | 27 | 55 | 67         | C0C72-H08-B |
|                                                                                   | 9                        | 27 | 55 | 68         | C0C72-H09-B |
|                                                                                   | 10                       | 27 | 55 | 70         | C0C72-H10-B |
|                                                                                   | 13                       | 27 | 55 | 75         | C0C72-H13-B |


### C0P72-M Priključni utikač - Spoljašnji navoj

|  | D1    | L1 | CH | Težina [g] | Tip           |
|-----------------------------------------------------------------------------------|-------|----|----|------------|---------------|
|                                                                                   | G1/8" | 31 | 13 | 17         | C0P72-M18-B-C |
|                                                                                   | G1/4" | 33 | 17 | 21         | C0P72-M14-B-C |
|                                                                                   | G3/8" | 33 | 19 | 26         | C0P72-M38-B-C |
|                                                                                   | G1/2" | 35 | 24 | 41         | C0P72-M12-B-C |
|                                                                                   |       |    |    |            |               |


### C0P72-F Priključni utikač - Unutrašnji navoj

|  | D1    | L1 | CH | Težina [g] | Tip         |
|-----------------------------------------------------------------------------------|-------|----|----|------------|-------------|
|                                                                                   | G1/8" | 31 | 13 | 16         | C0P72-F18-B |
|                                                                                   | G1/4" | 33 | 17 | 24         | C0P72-F14-B |
|                                                                                   | G3/8" | 33 | 19 | 23         | C0P72-F38-B |
|                                                                                   | G1/2" | 35 | 24 | 38         | C0P72-F12-B |
|                                                                                   |       |    |    |            |             |

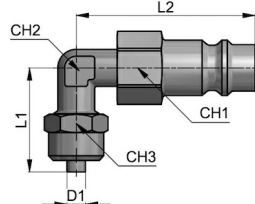
### C0P72-S Priključni utikač - Priključak creva

|  | D1   | L1 | Težina [g] | Tip         |
|-------------------------------------------------------------------------------------|------|----|------------|-------------|
|                                                                                     | 6/4  | 34 | 18         | C0P72-S06-B |
|                                                                                     | 8/6  | 34 | 19         | C0P72-S08-B |
|                                                                                     | 10/8 | 43 | 38         | C0P72-S10-B |
|                                                                                     |      |    |            |             |

### C0P72-H Priključni utikač - Nastavak za crevo

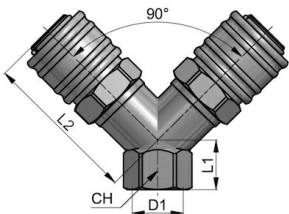
|  | Unutrašnji prečnik creva | L1 | Težina [g] | Tip         |
|-------------------------------------------------------------------------------------|--------------------------|----|------------|-------------|
|                                                                                     | 6                        | 44 | 14         | C0P72-H06-B |
|                                                                                     | 8                        | 44 | 18         | C0P72-H08-B |
|                                                                                     | 9                        | 44 | 17         | C0P72-H09-B |
|                                                                                     | 10                       | 47 | 19         | C0P72-H10-B |
|                                                                                     | 13                       | 47 | 24         | C0P72-H13-B |

### C0P72-E Priključni utikač - Priključak creva

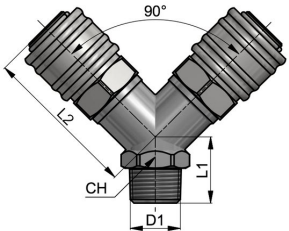
|  | D1   | L1   | L2   | CH1 | CH2 | CH3 | Težina [g] | Tip         |
|-------------------------------------------------------------------------------------|------|------|------|-----|-----|-----|------------|-------------|
|                                                                                     | 6/4  | 22,5 | 39   | 14  | 9   | 12  | 33         | C0P72-E06-B |
|                                                                                     | 10/8 | 25,5 | 44,5 | 17  | 11  | 16  | 56         | C0P72-E10-B |




### C0C72-2F 2-struko Razvodnik utičnica spojnice - Unutrašnji navoj

|                                                                                   |       |    |    |     |            |              |
|-----------------------------------------------------------------------------------|-------|----|----|-----|------------|--------------|
|  | D1    | L1 | L2 | CH1 | Težina [g] | Tip          |
|                                                                                   | G1/4" | 14 | 49 | 17  | 186        | C0C72-2F14-B |
|                                                                                   | G3/8" | 16 | 51 | 20  | 209        | C0C72-2F38-B |
|                                                                                   | G1/2" | 18 | 57 | 25  | 270        | C0C72-2F12-B |
|                                                                                   |       |    |    |     |            |              |


### C0C72-2M 2-struko Razvodnik utičnica spojnice - Spoljašnji navoj

|                                                                                   |       |    |    |     |            |              |
|-----------------------------------------------------------------------------------|-------|----|----|-----|------------|--------------|
|  | D1    | L1 | L2 | CH1 | Težina [g] | Tip          |
|                                                                                   | G1/4" | 20 | 49 | 17  | 191        | C0C72-2M14-B |
|                                                                                   | G3/8" | 22 | 51 | 20  | 220        | C0C72-2M38-B |
|                                                                                   | G1/2" | 26 | 57 | 25  | 286        | C0C72-2M12-B |
|                                                                                   |       |    |    |     |            |              |

### C0C72-3F 3-struko Razvodnik utičnica spojnice - Unutrašnji navoj

|                                                                                    |       |    |    |    |            |              |
|------------------------------------------------------------------------------------|-------|----|----|----|------------|--------------|
|  | D1    | L1 | L2 | L3 | Težina [g] | Tip          |
|                                                                                    | G1/4" | 20 | 83 | 77 | 443        | C0C72-3F14-B |
|                                                                                    | G3/8" | 16 | 83 | 77 | 431        | C0C72-3F38-B |
|                                                                                    | G1/2" | 23 | 78 | 78 | 435        | C0C72-3F12-B |
|                                                                                    |       |    |    |    |            |              |

### C0C72-3F 3-struko Razvodnik utičnica spojnice - Spoljašnji navoj

|                                                                                     |       |    |    |    |            |              |
|-------------------------------------------------------------------------------------|-------|----|----|----|------------|--------------|
|  | D1    | L1 | L2 | L3 | Težina [g] | Tip          |
|                                                                                     | G1/4" | 30 | 83 | 77 | 457        | C0C72-3M14-B |
|                                                                                     | G3/8" | 30 | 83 | 77 | 449        | C0C72-3M38-B |
|                                                                                     | G1/2" | 33 | 79 | 76 | 467        | C0C72-3M12-B |
|                                                                                     |       |    |    |    |            |              |

Ilustracije neobavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i materijalne izmene.

Pneumatika / Priključci i spojnice za pneumatiku / Spojnice / čep spojnice standard / spojnica DN 7,2 - mesing

Verzija 8

138554 / Generisano 2026/38 SR

+381 11 2399521  
balkan@stasto.eu  
© STASTO Automatizacija d.o.o.

www.stasto.rs  
Otvori seriju online  
Strana 3 / 3

