





3/2-Putni klizni ventil, 1/8"...1/2" Serija K32P

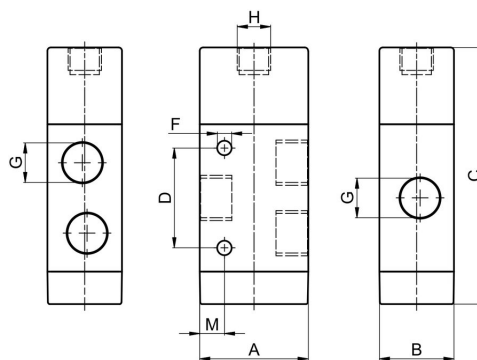

Konstrukcija	3/2-putni klizni ventil, Aktiviranje pneumatski/opružno vraćanje odnosno pneumatski/pneumatski
Priključak	G1/8"...G1/2" prema ISO228/1
Materijali	Telo Niklovani aluminijum, Klizač Aluminij, Zaptivke NBR
Način pričvršćivanja	Prolazni provrti u telu ventila
Položaj ugradnje	proizvoljno
Medij	filtrirani i podmazani ili nepodmazani komprimovani vazduh
Temperatura medijuma	0...+40°C
Temperatura okoline	-10...+50°C
Napomena za primenu	Veličina ventila 1/8" samo sa prigušivačem buke serije SLN-RB

K32P1.1. Aktiviranje pneumatski/opružno vraćanje





Priključak G	Nazivni prečnik DN [mm]	Opseg pritiska [bar]	A	B	C	D	F	H	M	Protok* [Nl/min]	Funkcija	Tip
G1/8"	6	3,1...9	28	18	66,2	22,2	3,2	G1/8"	8	690	NC	K32P1618
G1/8"	6	3,1...9	28	18	66,2	22,2	3,2	G1/8"	8	690	NO	K32P1918
G1/4"	8	3,1...9	32	22	75,3	29,3	4,2	G1/8"	7,3	1300	NC	K32P1614
G1/4"	8	3,1...9	32	22	75,3	29,3	4,2	G1/8"	7,3	1300	NO	K32P1914
G1/2"	14	3,1...9	50	30	108	45,6	5,2	G1/8"	11	4000	NC	K32P1612
G1/2"	14	3,1...9	50	30	108	45,6	5,2	G1/8"	11	4000	NO	K32P1912

*Referentni pritisak 6bar, Referentna temperatura 20°C




K32P201. Aktiviranje pneumatski/pneumatski

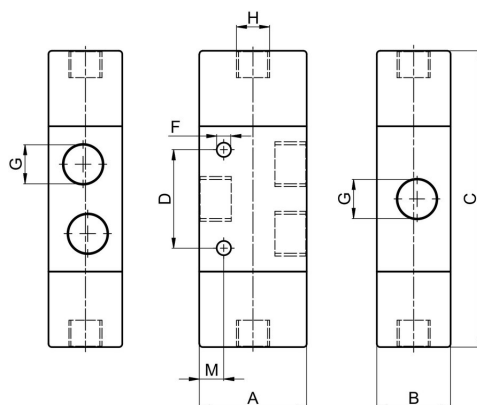


Priključak G	Nazivni prečnik DN [mm]	Opseg pritiska [bar]	A	B	C	D	F	H	M	Protok* [NI/min]	Funkcija	Tip
G1/8"	6	1...9	28	18	76,2	22,2	3,2	G1/8"	8	690	NC/NO	K32P2018
G1/4"	8	1...9	32	22	88,3	29,3	4,2	G1/8"	7,3	1300	NC/NO	K32P2014
G1/2"	14	1...9	50	30	121	45,6	5,2	G1/8"	11	4000	NC/NO	K32P2012

*Referentni pritisak 6 bar, Referentna temperatura 20°C


Dijagram protoka



Dijagram protoka 1/8"



Dijagram protoka 1/4"



Dijagram protoka 1/2"

Ilustracije neobavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i promene materijala

Pneumatika / Pneumatski razvodnici - električni/pneumatski / 3/2- 5/2- 5/3 razvodnik - Serija K (dimenzija konektora 16mm) / 3/2-razvodnik serije K3.P

Verzija 7

138288 / Generisano 2026/33 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Strana 2 / 2

